







△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.



HF
Halogen Free

RoHS
Compatible

發行
2014.09.30
達立

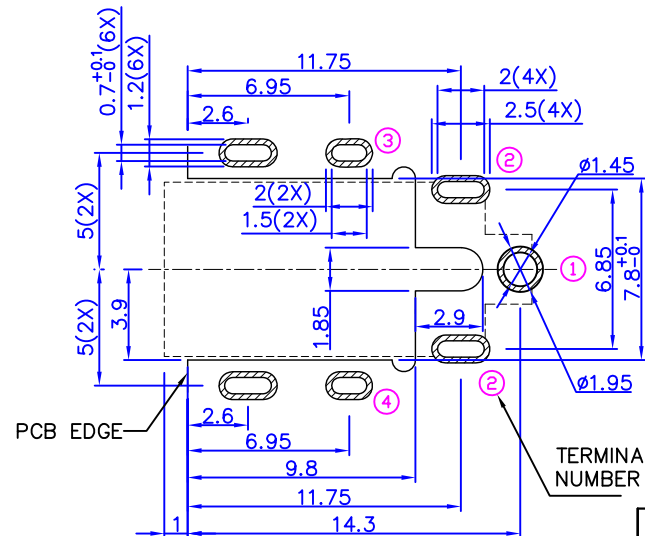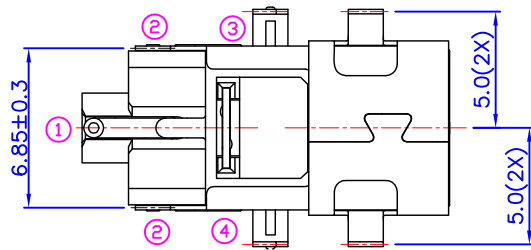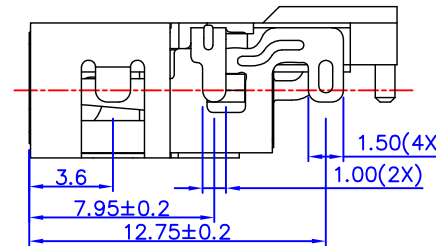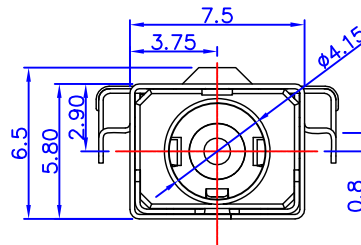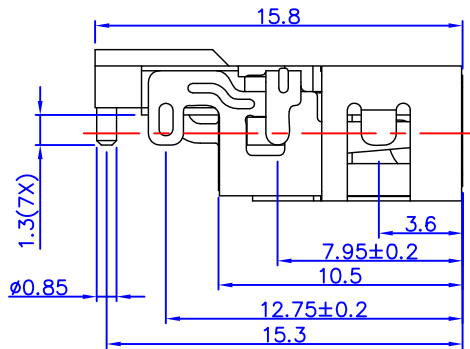

Order information :

DC-113DHS-HF


Halogen Free
With shield
Model type

Specification

- Rating : 3.5A, 16V DC Max
- Insulation resistance : DC 500V 100MΩ Min. ,
- Contact resistance : 100mΩ Max.
- Insertion and extraction force : 0.3~3kgs.
- Operating life: 5,000 cycles.

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm
(TOP VIEW)

MODEL NO.	DC-113DHS-HF
SCHEMATIC	
CENTER PIN	ø1.15mm

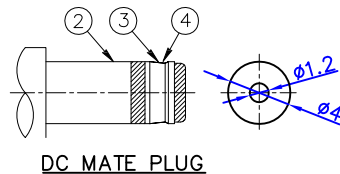

7	Terminal 1	Brass	1	Gold Flash
6	Terminal 2	Copper Alloy	1	Ni Plated
5	Terminal 3	Copper Alloy	1	Ag Plated
4	Terminal 4	Copper Alloy	1	Ag Plated
3	STOPPER	Brass	1	Ni Plated
2	SHIELD	Brass	1	Ni Plated
1	Housing	PBT	1	Black

No.	Part Name	Material	Q'ty	Remarks
	PART NAME			DC POWER SOCKET
	PART NO			DC-113DHS-HF
	DRAWING NO			
	DATE			2014/09/26

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	ROSS	SCALE		
DRAWING	ROSS	UNIT	mm	
CHECK	ELSA	SIZE	A4: 210*297	
APPROVAL	ERIC	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.30
0.0	±0.20
0.00	±0.10
ANGLE	±2°