

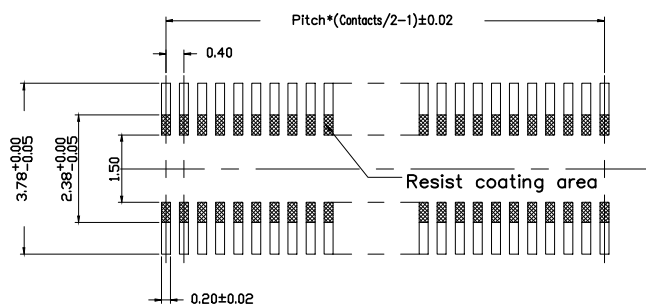






△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

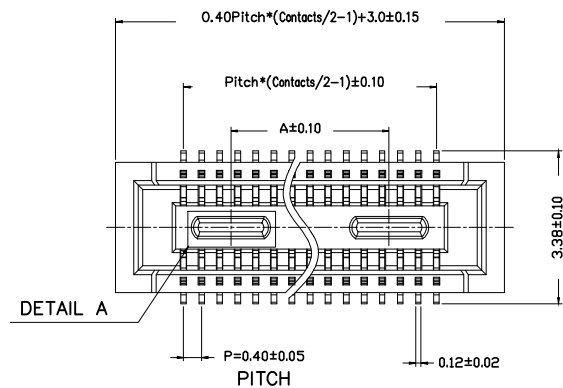

RECOMMENED P.C.B LAYOUT




DETAIL A
SCALE 2:1
(30P~100P)



Assembly

Specifications

1. Rating : 30V AC/DC, 0.3A
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 50MΩ Min.
5. Operating Temp. : -35°C~85°C

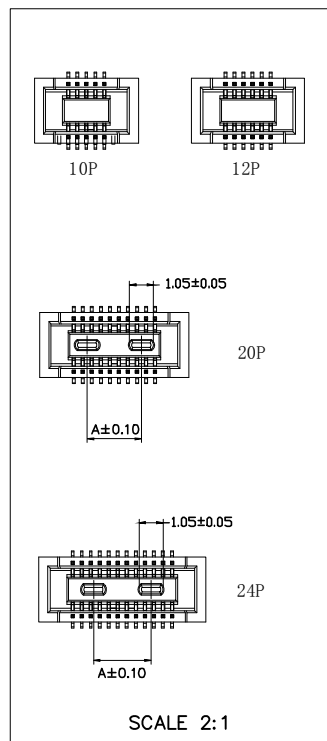

NO. of contacts	A
10	
12	
20	2.45
24	2.55
30	3.50
34	4.30
40	5.25
44	5.25
50	5.45
60	5.45
70	6.95
80	8.95
90	8.95
100	9.95

Standard type:

ASS'Y HIGH(H)	1.50	2.00	2.50	3.00	3.50	4.00
10P	○	—	○	—	—	—
12P	○	○	—	—	—	—
20P	○	○	○	—	○	—
24P	○	○	—	—	—	—
30P	○	○	○	○	○	—
34P	○	—	—	—	—	—
40P	○	○	○	○	○	—
44P	—	○	○	○	—	—
50P	○	○	○	○	○	○
60P	○	○	○	○	○	○
70P	○	○	—	○	—	—
80P	○	○	—	○	○	○
90P	○	—	—	○	—	○
100P	○	—	—	○	—	—

ASS'Y HIGH(H)	Socket(H1)
1.50	1.45
2.00	1.95
2.50	2.40
3.00	2.90
3.50	3.40
4.00	3.90

2	Contact	Copper alloy	XX	
1	Housing	LCP	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.50
0.0	±0.40
0.00	±0.25
ANGLE	±3°

PART NAME	BTB 0.4mm
PART NO	BT0430-S Series
DRAWING NO	
DATE	2020.02.26

R&D
2020.02.26
達立

RoHS
Compatible

Order information :
BT0430-SXXX-XXX XX X 01
1 2 3 4

1. Pin No.
2. Socket high
014 = 1.45
019 = 1.95
024 = 2.40
029 = 2.90
034 = 3.40
039 = 3.90
3. Plating spec
G1 = 3u" Gold
G2 = 5u" Gold
4. Packing :
T = Tube
P = Tube+CAP
R = Tape & Reel+CAP