


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.


R&D  
2019.01.03  
達立

**RoHS**  
**Compatible**

CIRCUIT DIAGRAM







RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

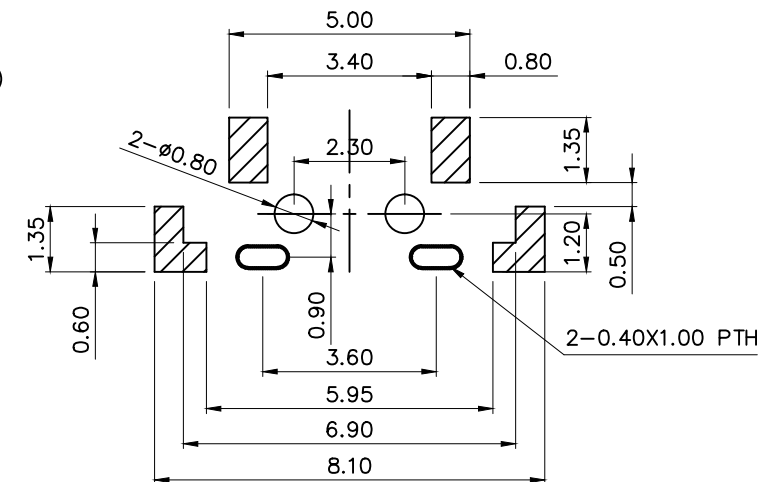

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 0.25±0.1mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 180±50gf
6. Operating life : 50,000 cycles Min.

5	Terminal	Brass	1	Ag Plated
4	Case	LCP	1	White
3	Contact	SUS	1	Ag Clad
2	Stem	PPA	1	Black
1	Cover	Brass	1	Ag Plated
No.	Part Name	Material	Q"ty	Finishing

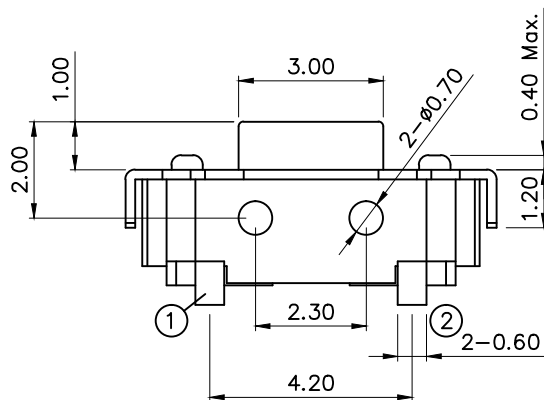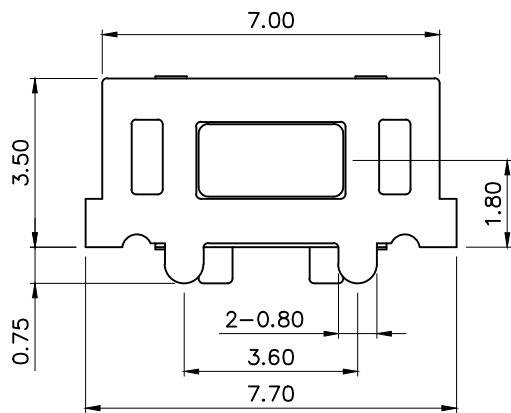

達立科技股份有限公司

**Dawning Precision Co., Ltd.**

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Honda	VERSION	03

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.50
0.0	±0.30
0.00	±0.20
ANGLE	±2°

PART NAME	TACT SWITCH
PART NO	TS-A12EH-180-S085
DRAWING NO	
DATE	2019/01/03