



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D
2018.05.24
達立




RoHS
Compatible

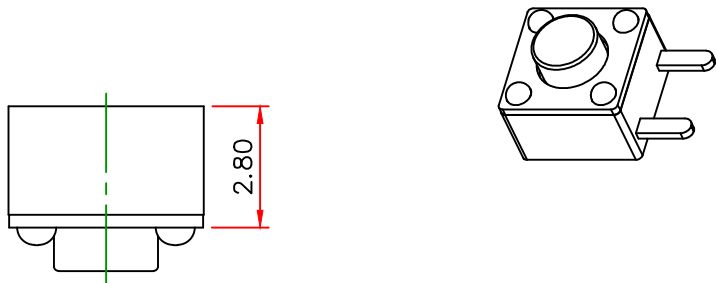

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING
PATTERN DIMENSION

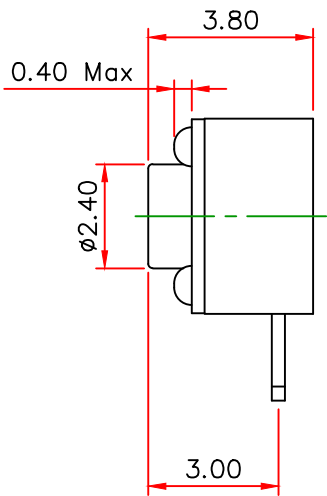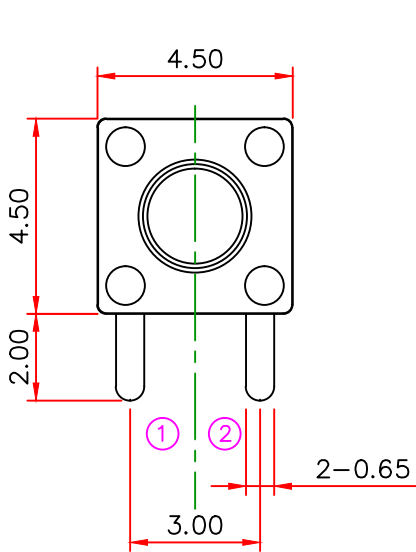

Specifications

- Rating : DC 12V, 50mA.
- Travel : 0.20±0.10mm
- Contact resistance : 100mΩ Max.
- Insulation resistance : 100MΩ Min.
- Operating force : 250±50gf
- Operating life : 100,000 cycles.

5	Stem	PPA	1	Black
4	Cover	Steel	1	Sn Plated
3	Contact	SUS	1	Ag Clad
2	Terminal	Brass	1	Ag Plated
1	Case	PPA	1	Black
No.	Part Name	Material	Q"ty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN Eason
DRAWING Eason
CHECK Eason
APPROVAL Honda

SCALE UNIT mm
SIZE A4: 210*297
VERSION 02

TOLERANCE UNLESS OTHERWISE STATED(mm)
0 ±0.35
0.0 ±0.30
0.00 ±0.20
ANGLE ±2°

PART NAME
PART NO
DRAWING NO
DATE

TACT SWITCH
TS-AN09V-3-S085
2018/05/24