



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

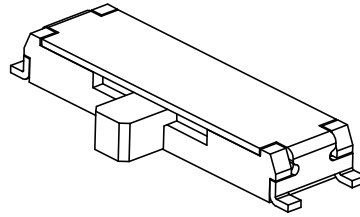


R&D發行
2023.12.15
達立

HF
Halogen Free

RoHS
Compatible



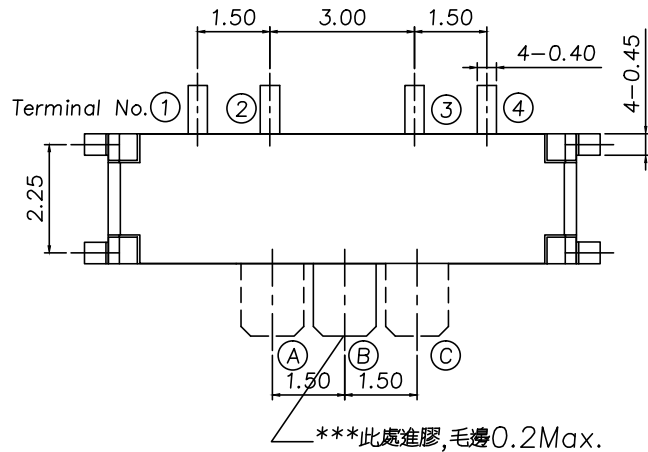


Circuit diagram



第一段 (A): ① ③
第二段 (B): ② ③
第三段 (C): ③ ④

P.C.B Mounting
Pattern Dimension

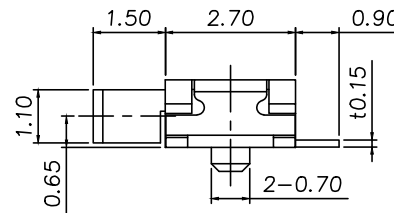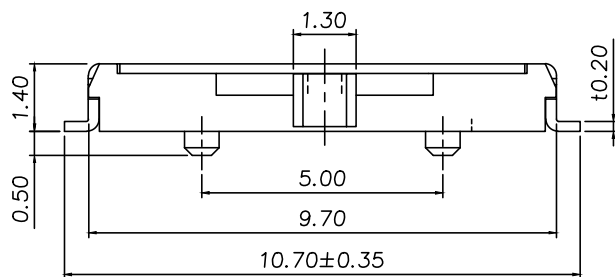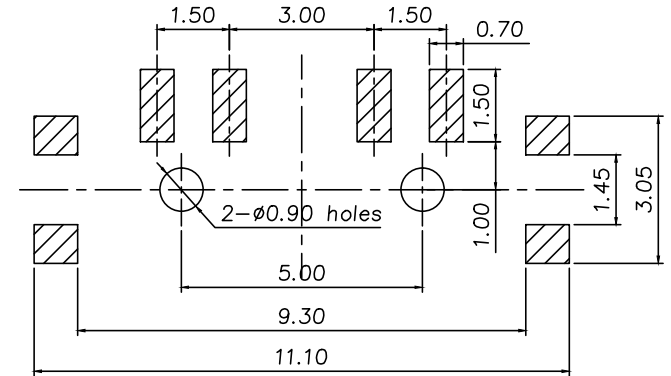

Specification

1. Rating : 0.3A, DC4V Max.
2. Contact Resistance : 70mΩ Max.
3. Travel : 1.5±0.3mm.
4. Operating force : 150±100gf
5. Operating life : 10,000 cycles Min.

6	Clip	Phosphor Bronze	1	Ag Plated
5	Terminal	Phosphor Bronze	1	Ag Plated
4	Cover	Phosphor Bronze	1	Ag Plated
3	Spring Plate	Stainless Steel	1	Natural
2	Stem	PA6T	1	Black
1	Case	LCP	1	Black
NO.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Charles	SCALE		
DRAWING	Charles	UNIT	mm	
CHECK	Charles	SIZE	A4: 210*297	
APPROVAL	Baker	VERSION	04	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.40
0.0	±0.30
0.00	±0.20
ANGLE	±2°

PART NAME	SLIDE SWITCH
PART NO	SS-C00AP-B-S001
DRAWING NO	
DATE	2023/12/15

www.dawning2.com.tw