




△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

**RoHS**  
Compatible




R&D發行  
2019.05.28  
達立

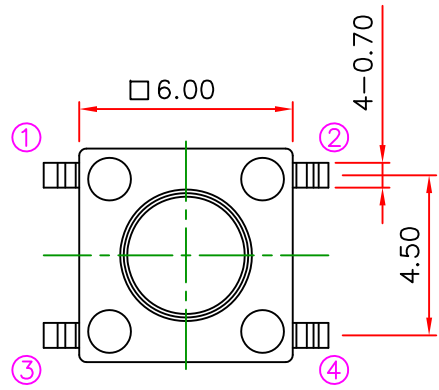

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

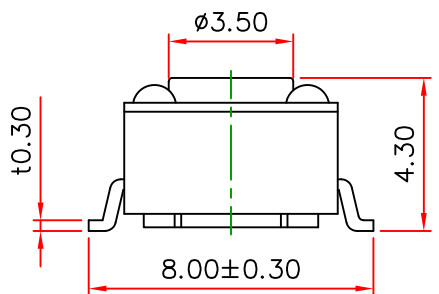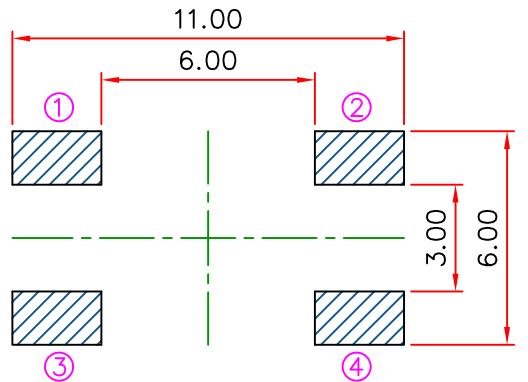

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 0.25±0.1mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 250±50gf
6. Operating life : 100,000 cycles Min.

5	Case	PPA	1	Black
4	Contact	SUS	1	Ag Clad
3	Stem	PPA	1	Black
2	Terminal	Brass	1	Ag Plated
1	Cover	Brass	1	Ni Plated
No.	Part Name	Material	Q'ty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	03	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
0 _____ ±0.40	PART NO	TS-A02S-3ED-S085
0.0 _____ ±0.30	DRAWING NO	
0.00 _____ ±0.20	DATE	2019/05/28
ANGLE _____ ±2°		