



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D
2019.04.09
達立





RoHS
Compatible



CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING
PATTERN DIMENSION

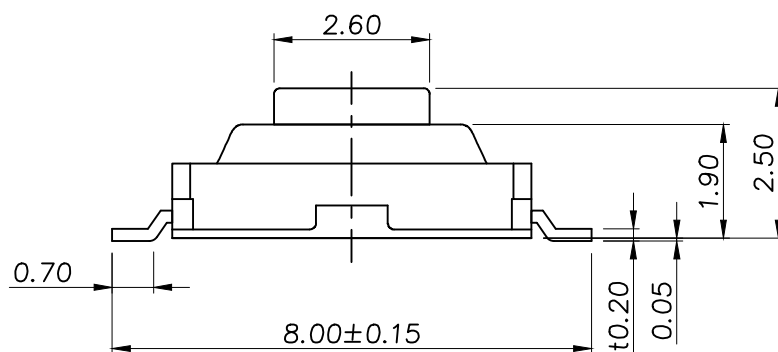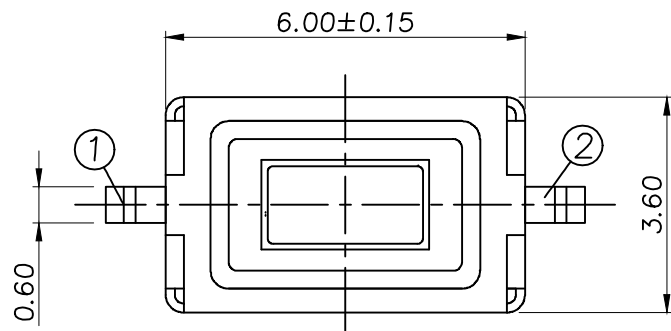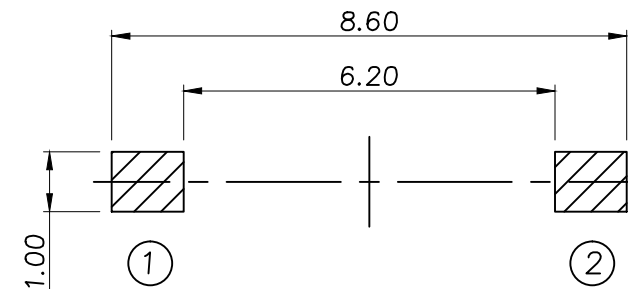

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 0.25±0.1mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 160±50gf
6. Operating life : 30,000 cycles Min.

6	Dust Cover	Pi film	1	—
5	Terminal	Brass	1	Ag Plated
4	Contact	Stainless steel	1	Ag Clad
3	Cover	Stainless steel	1	—
2	Knob	LCP	1	White
1	Case	LCP	1	Black
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	03	

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	TACT SWITCH
0	±0.50	PART NO	TS-A07GS-2-S085
0.0	±0.40	DRAWING NO	
0.00	±0.30	DATE	2019/04/09
ANGLE	±3'		