





△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D
2020.02.26
達立

RoHS
Compatible

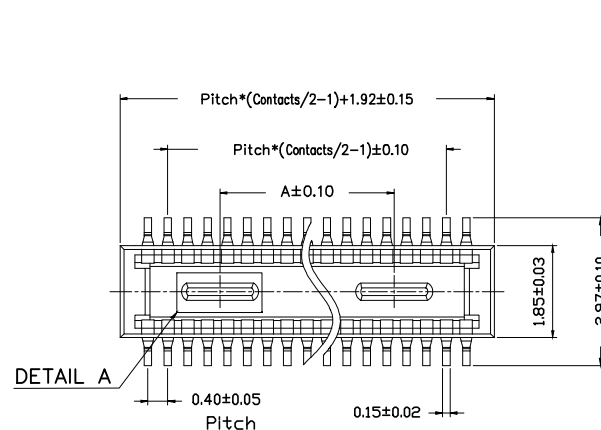



DETAIL A
SCALE 2:1
(30P~100P)

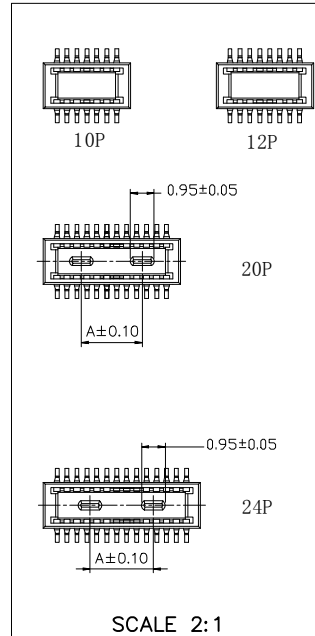



Order information :
BT0430-PXXX-XXX XX X 01
1 2 3 4

- Pin No.
- Plug high
008 = 0.80
010 = 1.00
011 = 1.15
- Plating spec
G1 = 3u" Gold
G2 = 5u" Gold
- Packing :
T = Tube
P = Tube+CAP
R = Tape & Reel+CAP

- Specifications**
- Rating : 30V AC/DC, 0.3A
 - Contact resistance : 100mΩ Max.
 - Insulation resistance : 50MΩ Min.
 - Operating Temp. : -35°C~85°C



RECOMMENED P.C.B LAYOUT

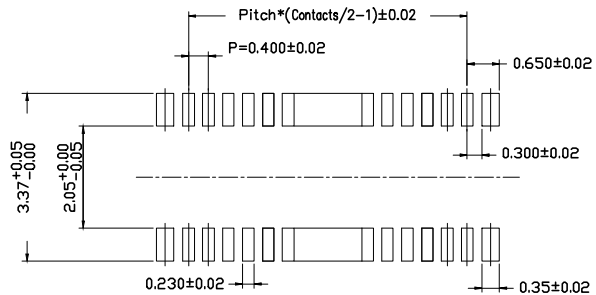

No. of contacts	A		
10			
12			
20	2.45		
24	2.55		
30	3.50		
34	4.30		
40	5.25		
44	5.25	ASSY HIGH(H)	Socket(H)
50	5.45	1.50	1.45
60	5.45	2.00	1.95
70	6.95	2.50	2.40
80	8.95	3.00	2.90
90	8.95	3.50	3.40
100	9.95	4.00	3.90

2	Contact	Copper alloy	XX	
1	Housing	LCP	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	BTB 0.4mm
0 ±0.50	PART NO	BT0430-P Series
0.0 ±0.40	DRAWING NO	
0.00 ±0.25	DATE	2020.02.26
ANGLE ±3°		