


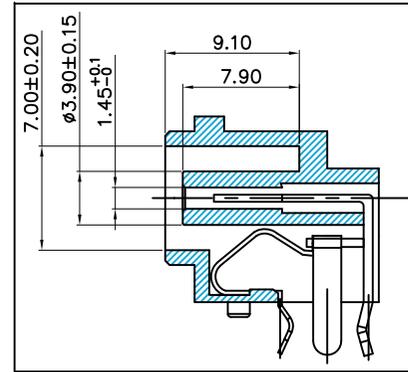


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.



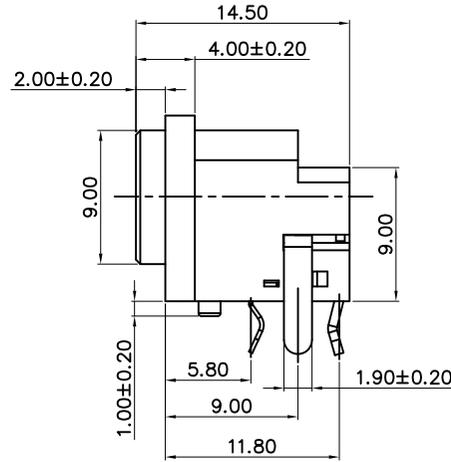


R&D發行  
2021.04.20  
達立

**RoHS**  
Compatible

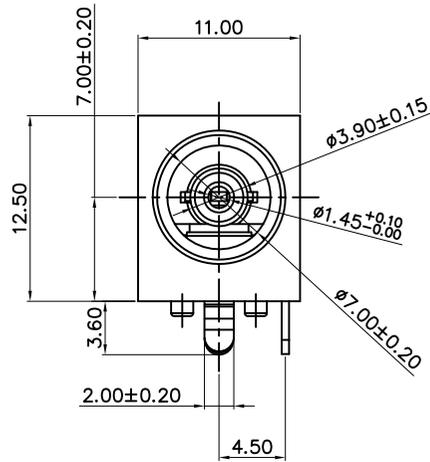


RECOMMENED P.C.B MOUNTING  
PATTERN DIMENSION(TOW VIEW)

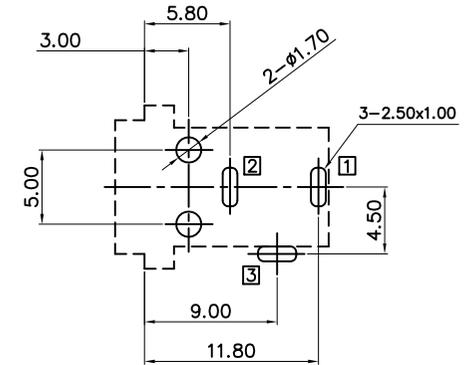

DC MATE PLUG

CIRCUIT DIAGRAM



Specifications

1. Rating: DC 12V, 7A
2. Contact resistance: 30mΩ Max at initial.
3. Insulation resistance: 100MΩ Min.
4. Insertion and Extraction: 3-30N
5. Operating life: 5,000 cycles Min.
6. Operating temperature: -20°C~70°C

4	Shut Terminal	3	Brass t0.5	1	Ag Plated
3	Tip spring	2	Phospher Bronzes t0.25	1	Ag Plated
2	Center pin	1	Phospher Bronzes t0.6	1	Ag Plated
1	Housing		PA66	1	Black
No.	Part Name		Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	John	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DC POWER JACK
0	PART NO	DC-049-2-S057
0.0	DRAWING NO	
0.00	DATE	2021/04/20
ANGLE		