


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.











Order information :
 FP05100-XX 0 G 0-S209
 1 2 3 4

RD&發行
 2025.05.28
 達立

RoHS
Compatible

- Pin No. : 04~40
- Packing :
0 = Tape & Reel
- Plating spec :
G = Gold flash(contact point)
0 = Housing(Nature)+Cover(Black)

PIN NO.	Dimensions			
	A	B	C	D
4	1.50	2.56	4.00	3.37
5	2.00	3.06	4.50	3.87
6	2.50	3.56	5.00	4.37
8	3.50	4.56	6.00	5.37
10	4.50	5.56	7.00	6.37
12	5.50	6.56	8.00	7.37
14	6.50	7.56	9.00	8.37
16	7.50	8.56	10.00	9.37
18	8.50	9.56	11.00	10.37
20	9.50	10.56	12.00	11.37
22	10.50	11.56	13.00	12.37
24	11.50	12.56	14.00	13.37
26	12.50	13.56	15.00	14.37
28	13.50	14.56	16.00	15.37
30	14.50	15.56	17.00	16.37
32	15.50	16.56	18.00	17.37
34	16.50	17.56	19.00	18.37
40	19.50	20.56	22.00	21.37

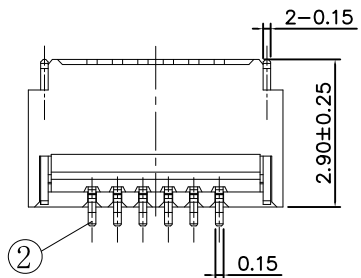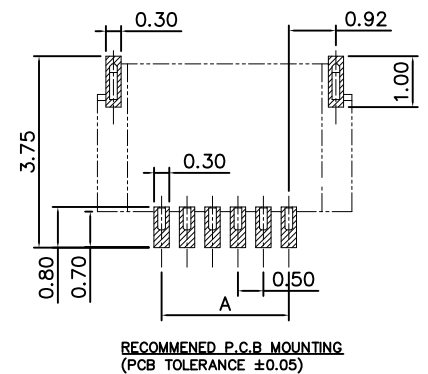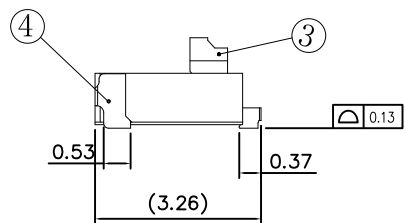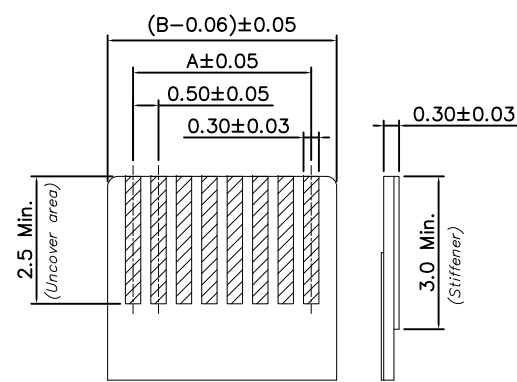

- Specifications**
- Voltage Rating : 50V AC,DC
 - Contact resistance : 30mΩ Max.
 - Insulation resistance : 500MΩ Min.
 - Temperature Range : -25°C ~ +85°C

4	Fitting Nail	Copper alloy	1	Sn Plated
3	Cover	LCP ,UL94 V-0	1	Black
2	Contact	Copper alloy	1	_____
1	Housing	LCP ,UL94 V-0	1	Natural
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
 TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Baker	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	FPC 0.5mm PITCH H=1.0mm
0 _____ ±0.50	PART NO	FP05100-XX0G0-S209
0.0 _____ ±0.25	DRAWING NO	
0.00 _____ ±0.20	DATE	2025.05.28
ANGLE _____ ±2°		