


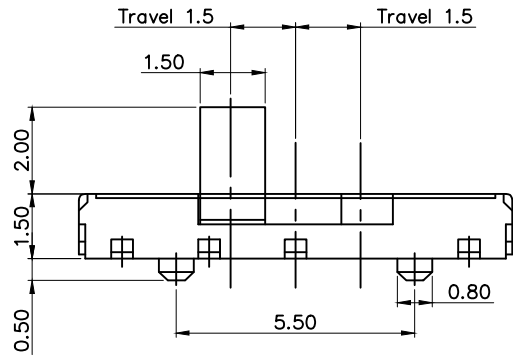


RoHS
Compatible


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

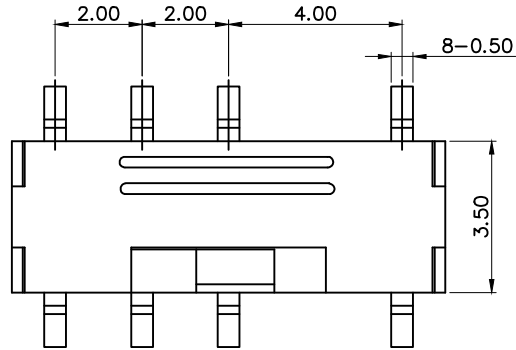

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

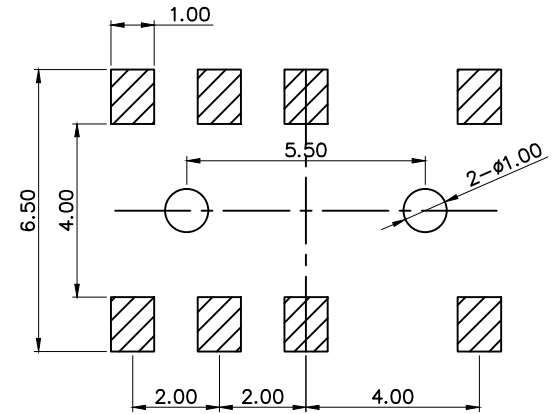

Specifications

1. Rating : DC 4V, 30mA.
2. Travel : 1.50mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 200±150gf
6. Operating life : 10,000 cycles Min.

6	Clip	Beryllium	1	———
5	Stem	Nylon	1	Black
4	Cover	Stainless steel	1	———
3	Spring	Stainless steel	1	———
2	Terminal	Brass	1	Ag Plated
1	Base	Nylon	1	Black
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
0 ——— ±0.35	PART NO	SS-C91B-S001
0.0 ——— ±0.30	DRAWING NO	
0.00 ——— ±0.20	DATE	2019/10/30
ANGLE ——— ±2'		