
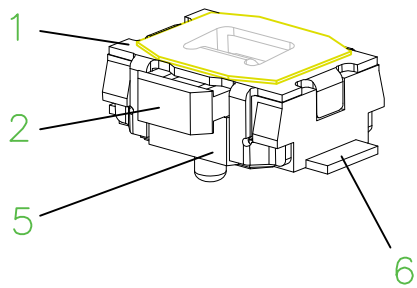


4				
3				
2				
1				
ZONE	REV	DESCRIPTION	DATE	APPD.


ORDER INFORMATION :  
 TS-A15E-PI-220-S085  
 Force: 220gf  
 PI film on top

R&D發行  
 2019.08.06  
 達立




**RoHS**  
 Compatible

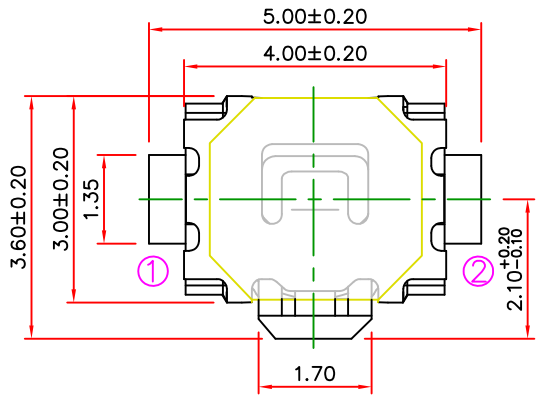

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

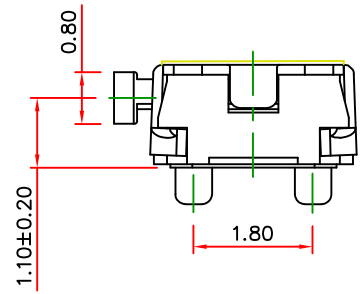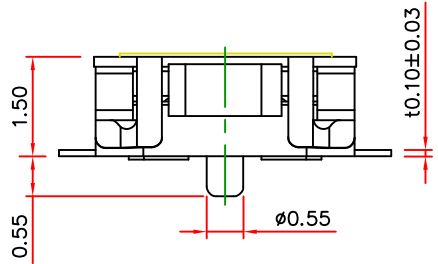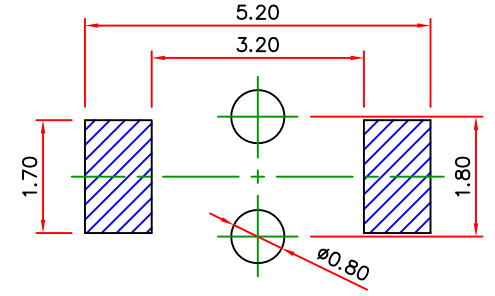

Specifications

1. Rating: DC 12V, 50mA Max.
2. Contact Resistance: 100mΩ Max.
3. Insulation Resistance: 100MΩ Min.
4. Travel: 0.20±0.1mm
5. Operating Force: 220±50gf
6. Operating Life: 50,000 cycles Min.

6.	Terminal	Phosphor Bronze	1	Ag Plated
5.	Case	PA6T	1	White
4.	Contact	SUS	2	Ag Clad
3.	Dust Cover	PI film	2	Yellow
2.	Stem	PA6T	1	Black
1.	Cover	SUS	1	
No.	Part Name	Material	Q'ty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
 TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	TACT SWITCH
0	±0.30	PART NO	TS-A15E-PI-220-S085
0.0	±0.20	DRAWING NO	
0.00	±0.10	DATE	2019/08/06
ANGLE	±2°		

www.dawning2.com.tw