
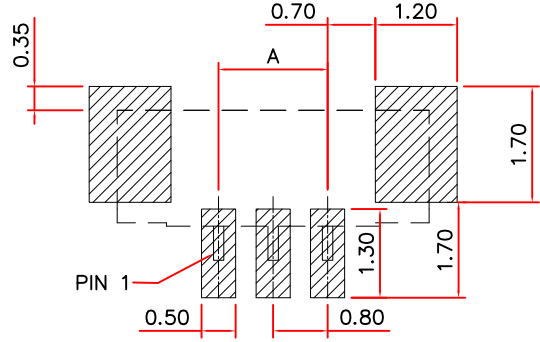


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2020.04.10
達立

RoHS
Compatible




RECOMMENDED P.C.B. MOUNTING
(PCB TOLERANCE ±0.05)





PIN NO.	Dimensions			
	A	B	C	D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

ORDER INFORMATION :
WB0820H-XX X X X X
1 2 3 4 5 6

1. HALOGEN FREE
2. PIN NO.: 02~20
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn 100u" Min.
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK
6. COLOR
C : COVER
M : MYLAR

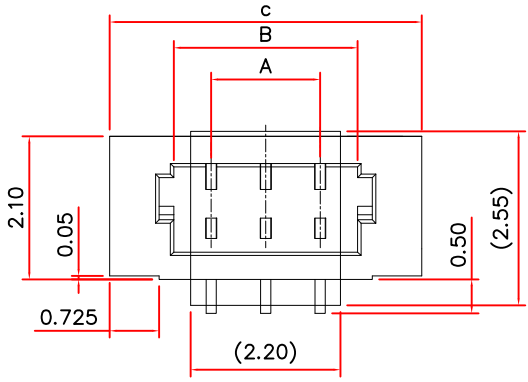

Mylar
L*W(3.0*2.1mm)(2~5 PIN)
L*W(6.0*2.1mm)(6~10 PIN)
L*W(9.0*2.1mm)(11~15 PIN)
L*W(12.0*2.1mm)(15~20 PIN)

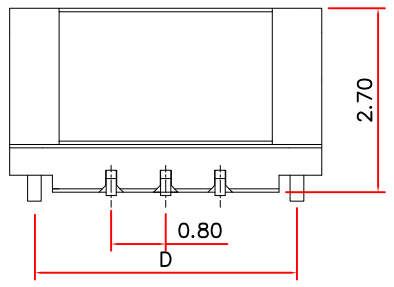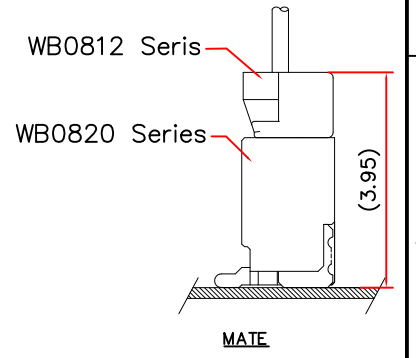

3	FITTING NAIL	Copper Alloy	1	—
2	Terminal	Copper Alloy	1	—
1	Insulator	High-Temp Thermoplastic	1	UL94V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 0.80mm PITCH
0 — ±0.50	PART NO	WB0820H-XXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.10
ANGLE — ±2°		