
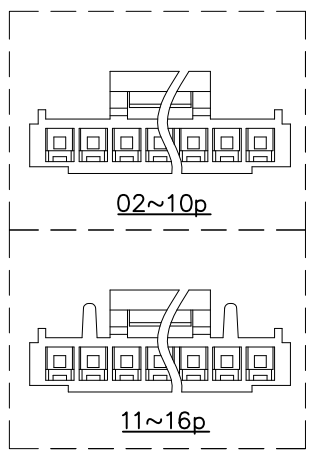


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2020.04.30
達立




RoHS
Compatible

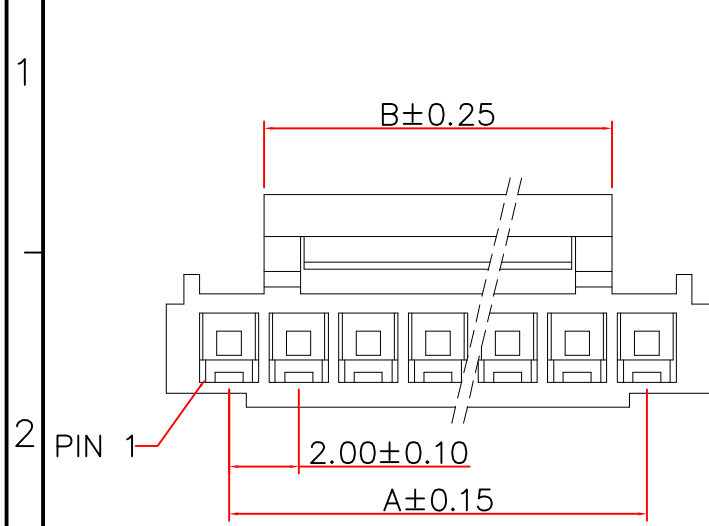

PIN NO.	Dimensions			
	A	B	C	D
2	2.00	3.20	4.60	5.60
3	4.00	4.00	6.60	7.60
4	6.00	5.00	8.60	9.60
5	8.00	6.20	10.60	11.60
6	10.00	8.20	12.60	13.60
7	12.00	10.20	14.60	15.60
8	14.00	12.20	16.60	17.60
9	16.00	14.20	18.60	19.60
10	18.00	16.20	20.60	21.60
11	20.00	16.20	22.60	23.60
12	22.00	16.20	24.60	25.60
13	24.00	16.20	26.60	27.60
14	26.00	16.20	28.60	29.60
15	28.00	16.20	30.60	31.60
16	30.00	18.20	32.60	33.60

ORDER INFORMATION :
WB2003H-H $\frac{XXX}{1}$ $\frac{X}{2}$ $\frac{X}{3}$

1. HALOGEN FREE
2. PIN NO.: 002~016
3. COLOR
N : NATURAL
B : BLACK

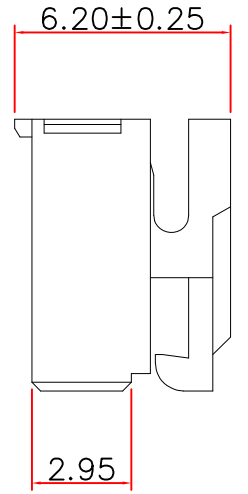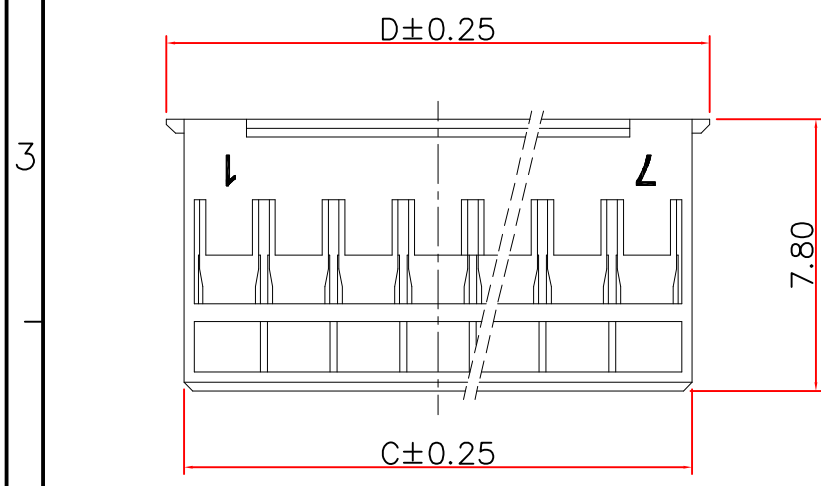

Specifications

1. Current Rating : 2A AC,DC
2. Voltage Rating : 250V AC,DC
3. Contact resistance : 20mΩ Max.
4. Insulation resistance : 1000MΩ Min.
5. Withstanding Voltage : 1000V AC for one minute
6. Temperature Range : -25°C ~ +85°C

1	Insulator	PA66	1	UL94-V0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	
TOLERANCE UNLESS OTHERWISE STATED(mm)				
0	±0.50			
0.0	±0.25			
0.00	±0.15			
ANGLE	±2°			

PART NAME	WTB PLUG 2.00mm PITCH
PART NO	WB2003H-HXXXX
DRAWING NO	
DATE	2020.04.30