
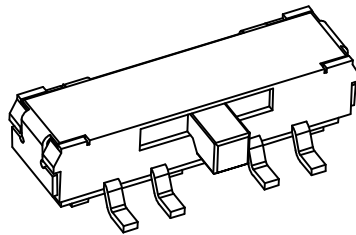



▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行  
2017.11.01  
達立




**RoHS**  
**Compatible**

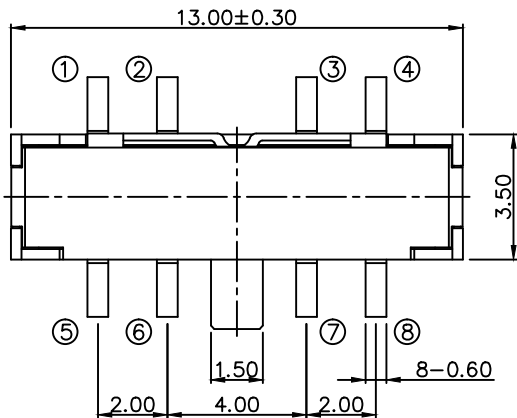

CIRCUIT DIAGRAM

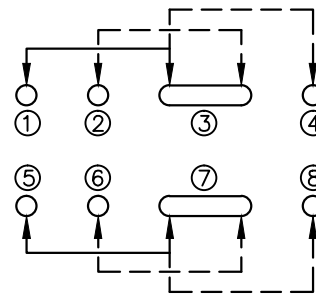

RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

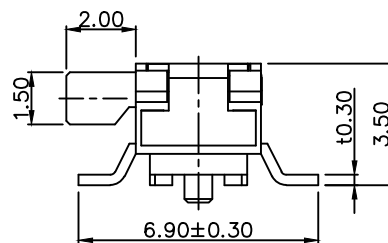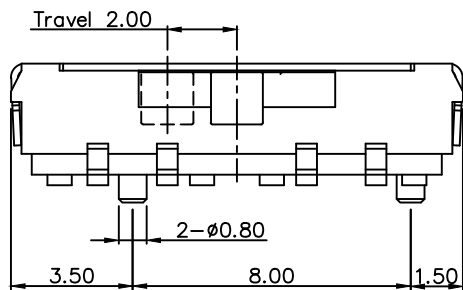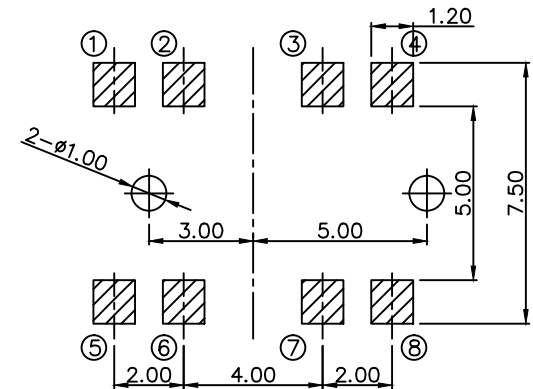

Specifications

1. Rating : DC 12V, 0.1A.
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 50MΩ Min.
4. Operating force : 230±100gf
5. Operating life : 10,000 cycles

5	Terminal	PBS	1	Ag Plated
4	Spring	BeCu	1	Ag Plated
3	Case	LCP	1	Black
2	Cover	SUS	1	———
1	Knob	PA46	1	Black
No.	Part Name	Material	Q"ty	Finishing

達立科技股份有限公司

**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
0 ——— ±0.30	PART NO	SS-F46S-S085
0.0 ——— ±0.25	DRAWING NO	
0.00 ——— ±0.20	DATE	2017/11/01
ANGLE ——— ±2'		