

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RECOMMENDED P.C.B MOUNTING
(PCB TOLERANCE ± 0.05)

R&D發行
2020.04.10
達立





RoHS
Compatible

ORDER INFORMATION :


WB1002H-XX X X X X
1 2 3 4 5 6

1. HALOGEN FREE
2. PIN NO.: 02~24
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn 100~150u"
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK
6. C : COVER
M : Mylar

PIN NO.	Dimensions		
	A	B	C
2	1.00	4.00	2.40
3	2.00	5.00	3.40
4	3.00	6.00	4.40
5	4.00	7.00	5.40
6	5.00	8.00	6.40
7	6.00	9.00	7.40
8	7.00	10.00	8.40
9	8.00	11.00	9.40
10	9.00	12.00	10.40
11	10.00	13.00	11.40
12	11.00	14.00	12.40
13	12.00	15.00	13.40
14	13.00	16.00	14.40
15	14.00	17.00	15.40
16	15.00	18.00	16.40
17	16.00	19.00	17.40
18	17.00	20.00	18.40
19	18.00	21.00	19.40
20	19.00	22.00	20.40
22	21.00	24.00	22.40
24	23.00	26.00	24.40

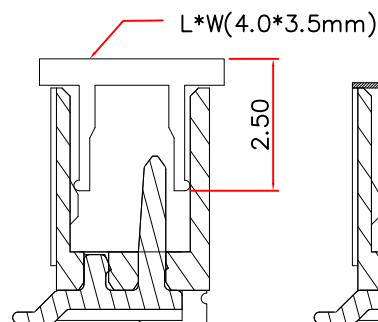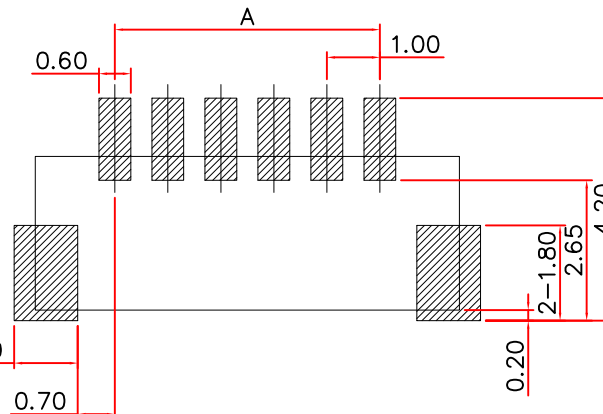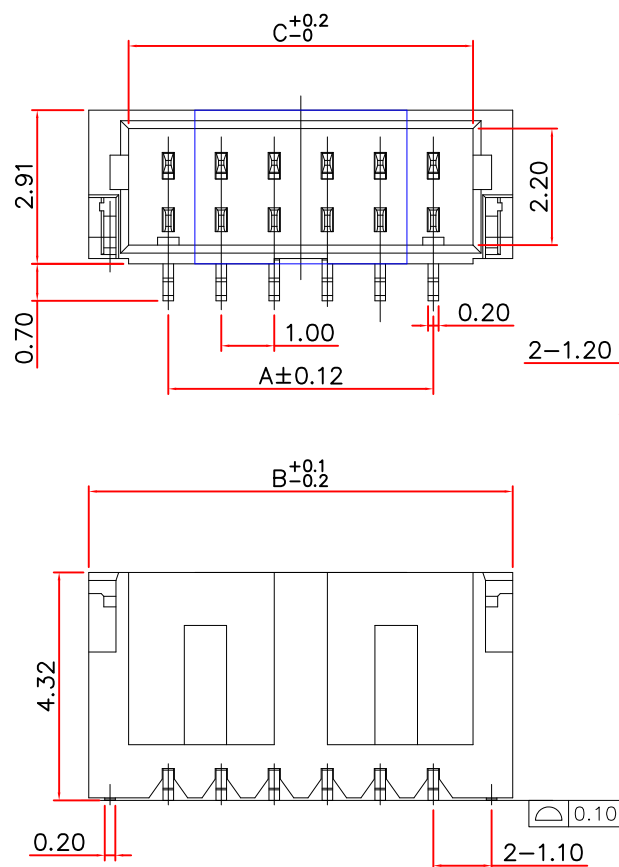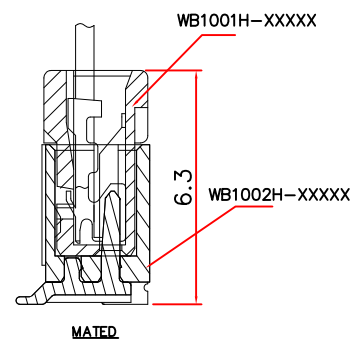

COVER (15~24PIN)



Mylar

L*W(2.5*3.4mm)(2~3 PIN)
L*W(4.5*3.4mm)(4~8 PIN)
L*W(9.5*3.4mm)(9~14 PIN)

3	PEG	Copper Alloy	1	—
2	Terminal	Copper Alloy	1	—
1	Insulator	High-Temp Thermoplastic	1	—
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Honda	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 1.00mm PITCH
0 — ±0.50	PART NO	WB1002H-XXXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.10
ANGLE — ±2°		