
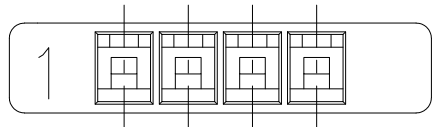
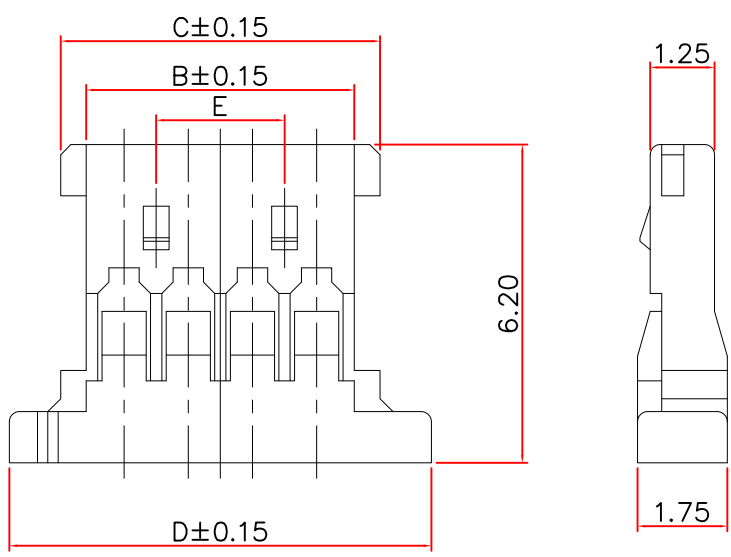


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2020.04.08
達立

RoHS
Compatible

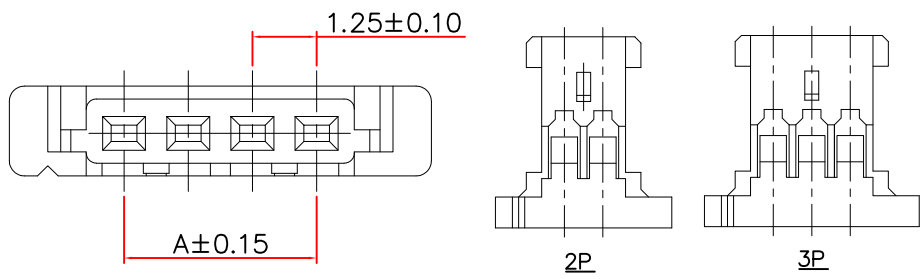

PIN NO.	Dimensions				
	A	B	C	D	E
2	1.25	2.72	3.72	5.72	—
3	2.50	3.97	4.97	6.97	—
4	3.75	5.22	6.22	8.22	2.50
5	5.00	6.47	7.47	9.47	3.75
6	6.25	7.72	8.72	10.72	5.00
7	7.50	8.97	9.97	11.97	6.25
8	8.75	10.22	11.22	13.22	7.50
9	10.00	11.47	12.47	14.47	8.75
10	11.25	12.72	13.72	15.72	10.00
11	12.50	13.97	14.97	16.97	11.25
12	13.75	15.22	16.22	18.22	12.50
13	15.00	16.47	17.47	19.47	13.75
14	16.25	17.72	18.72	20.72	15.00
15	17.50	18.97	19.97	21.97	16.25
16	18.75	20.22	21.22	23.22	17.50
18	21.25	22.72	23.72	25.72	20.00
20	23.75	25.22	26.22	28.22	22.50
22	26.25	27.72	28.72	30.72	22.50
24	28.75	30.22	31.22	33.22	22.50
26	31.25	32.72	33.72	35.72	22.50
28	33.75	35.22	36.22	38.22	22.50
30	36.25	37.72	38.72	40.72	22.50

ORDER INFORMATION :
WB1251H-H $\frac{XXX}{1}$ $\frac{X}{2}$ $\frac{X}{3}$

1. HALOGEN FREE
2. PIN NO.: 002~030
3. COLOR
N : NATURAL
B : BLACK

Specifications

- Current Rating : 2.3 A(AWG#26) / 1.8 A(AWG#28)
1.0 A(AWG#30) / 0.8 A(AWG#32)
- Voltage Rating : 200V AC
- Contact resistance : 30mΩ Max.
- Insulation resistance : 100MΩ Min.
- Withstanding Voltage : 500V AC for one minute
- Temperature Range : -40°C ~ +85°C

1	Insulator	PA66	1	UL94-V0
No.	Part Name	Material	Qty	Finishing
TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	WTB PLUG 1.25mm PITCH	
0	±0.50	PART NO	WB1251H-HXXXX	
0.0	±0.25	DRAWING NO		
0.00	±0.15	DATE	2020.04.08	
ANGLE	±2°			

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	