







RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.


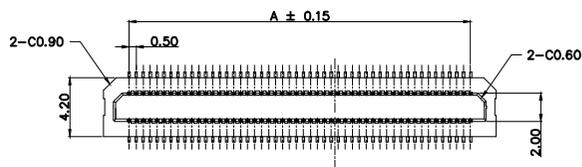


SECTION A-A
Scale 2:1

MATED HEIGHT

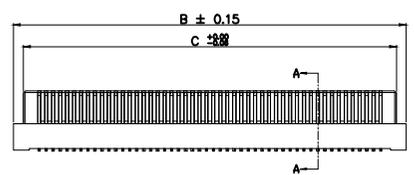

CKT.	DimA	DimB	DimC
30	7.00	10.70	9.30
40	9.50	13.20	11.80
80	19.50	23.20	21.80
100	24.50	28.20	26.80

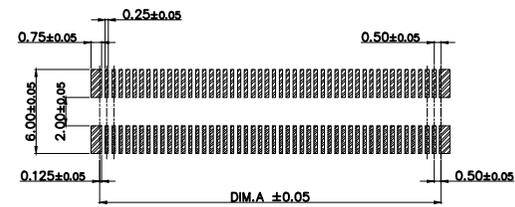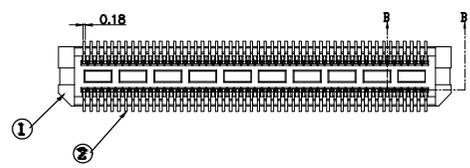

RECOMMENED P.C.B LAYOUT

Order information :
BT0501(H)-XX X X X
1 2 3 4 5

- Without "H" : With Halogen
With "H" : Halogen free
- Pin No.
- Packing :
0 = Tape & Reel
- Plating spec
GS = Gold flash on contact area
T15S = Gold 15U" on contact area
- Housing :
B = Black
N = Natural

Specifications

- Current Rating : 0.5A/ PIN,
10A/ All PINS
- Votage Rating : 60V DC
- Contact resistance : 60mΩ Max.
- Insulation resistance : 1000MΩ Min.
- Dielectric withstanding voltage : 150V AC.
- Composite insertion force : 0.785N Max.
- Composite removal force : 0.0588N Min.
- Operating temperature : -55°C~+85°C
- Life test : 50 Cycles.

2	Terminal	Copper alloy	XX	t=0.15mm
1	Housing	ThermalPlastic	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	BTB 0.5mm Pitch
0 ±0.35	PART NO	BT0501(H) Series
0.0 ±0.25	DRAWING NO	
0.00 ±0.15	DATE	2020.02.26
ANGLE ±3'		