

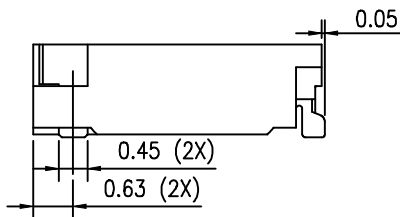
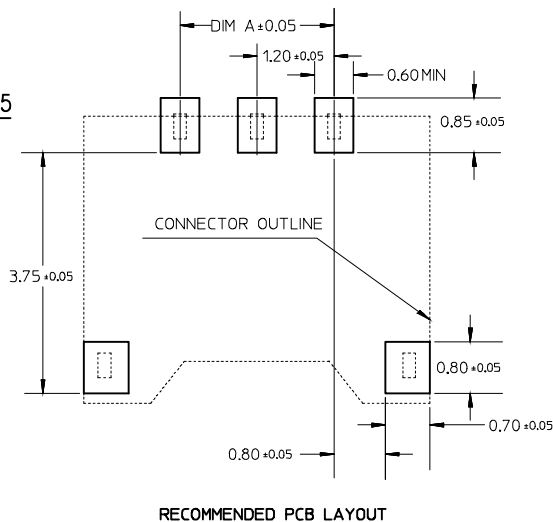
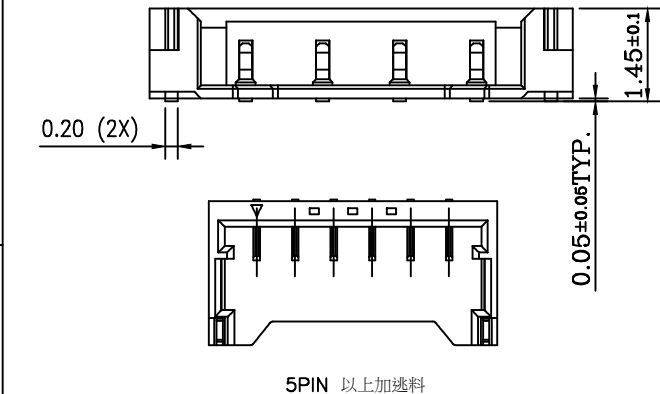


ZONE	REV	DESCRIPTION	DATE	APPD.
△				
△				
△				
△				

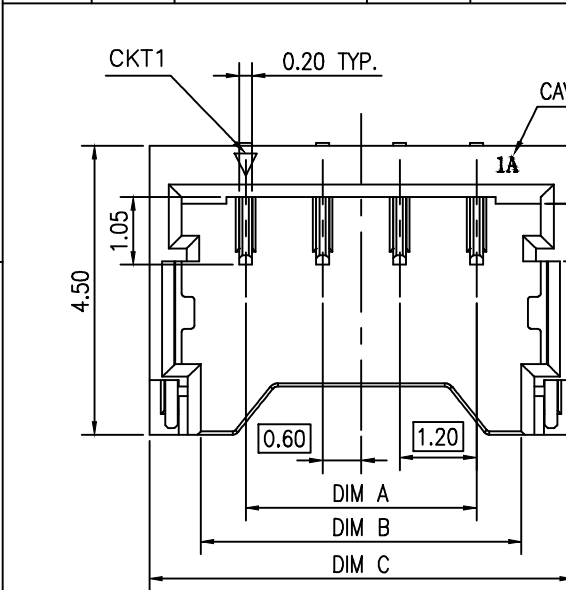

WB1202H - XX X X X
 PIN NO. X X X
 PLATING SPEC
 S:MATT Sn
 G:GOLD FLASH
 T:GOLD 3U" CONTACT AREA
 Z:GOLD 10U" CONTACT AREA

RoHS
Compatible

SPECIFICATIONS
 Current Rating: AWG#30:1.0 AC,DC
 AWG#28:1.5 AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated
 Solder Tabs: Brass/Gold-plated
 Material: PA4T ,UL94V-0
 Color: Black

CKT	DIM A	DIM B	DIM C
02	1.2	2.6	4.2
03	2.4	3.8	5.4
04	3.6	5.0	6.6
05	4.8	6.2	7.8
06	6.0	7.4	9.0
07	7.2	8.6	10.2
08	8.4	9.8	11.4
09	9.6	11.0	12.6
10	10.8	12.2	13.8
11	12.0	13.4	15.0
12	13.2	14.6	16.2
13	14.4	15.8	17.4
14	15.6	17.0	18.6
15	16.8	18.2	19.8

達立科技股份有限公司

Dawning Precision Co.,Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Honda	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm) 0 ——— ±0.35 0.0 ——— ±0.25 0.00 ——— ±0.15 ANGLE ——— ±3°	PART NAME	WTB WAFER 1.20mm Pitch
DRAWING	Honda	UNIT	mm			PART NO	WB1202H SERIES
CHECK	Honda	SIZE	A4: 210*297			DRAWING NO	
APPROVAL	Honda	VERSION	01			DATE	2020.04.07