
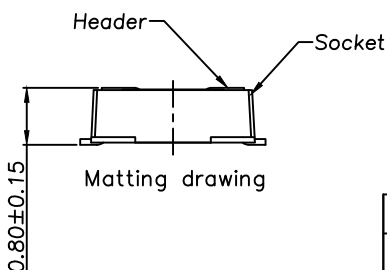

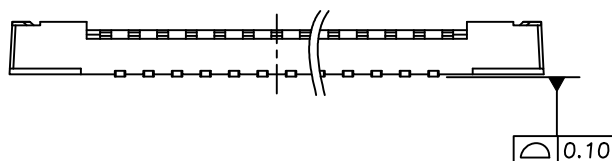
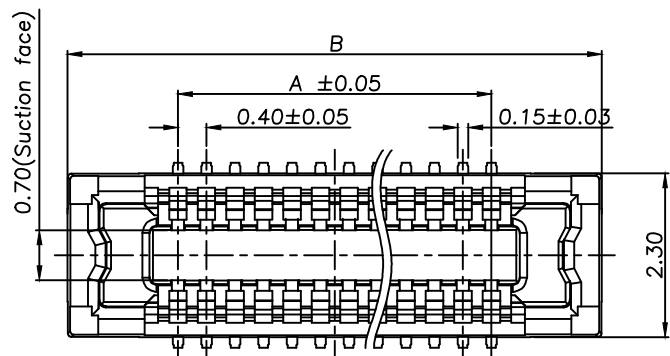



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Order information :
BT0402-SXXX-077 G R -S219
1 2 3 4

1. Pin No.: 010~044
2. Housing high
077=0.77
3. Plating
G = Au
4. Packing :
R = Tape & Reel

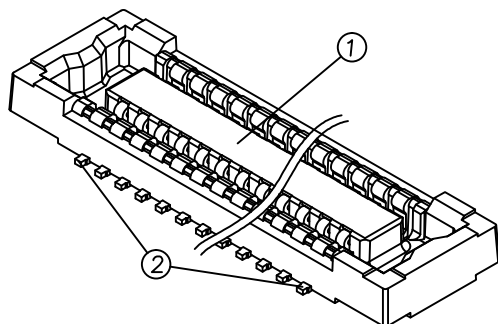

RECOMMENED P.C.B LAYOUT

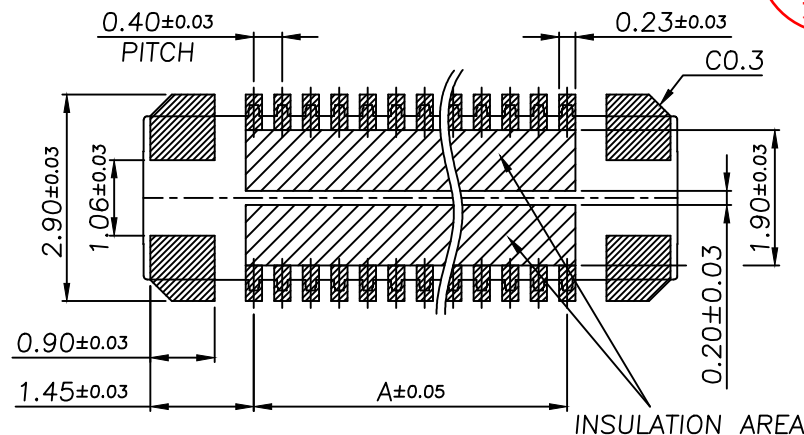

Dimension table(mm)

No. of contacts	Dimension	
	A	B
✖ 10	1.60	4.70
✖ 12	2.00	5.10
✖ 14	2.40	5.50
✖ 16	2.80	5.90
✖ 18	3.20	6.30
✖ 20	3.60	6.70
✖ 22	4.00	7.10
✖ 24	4.40	7.50
✖ 26	4.80	7.90
✖ 30	5.60	8.70
✖ 34	6.40	9.50
✖ 40	7.60	10.70
✖ 44	8.40	11.50

Specifications

1. Rating : 30V AC/DC, 0.5A
2. Contact resistance : 80mΩ Max.
3. Insulation resistance : 1000MΩ Min.
4. Dielectric withstanding voltage: 150 V(AC) for 1 min.
5. Operating Temp. : -55°C~85°C

2	Contact	Copper Alloy	XX	Au Plated
1	Housing	High-Temp Thermoplastic	1	Black
No.	Part Name	Material	Qty	Finishing
	PART NAME	BTB 0.4mm Female SMT		
	PART NO	BT0402-SXXX-077GR-S219		
	DRAWING NO			
	DATE	2021.02.19		

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	John	SCALE	
DRAWING		UNIT	mm
CHECK	John	SIZE	A4: 210*297
APPROVAL	John	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.50
0.0	±0.25
0.00	±0.15
ANGLE	±3°

PART NAME	BTB 0.4mm Female SMT
PART NO	BT0402-SXXX-077GR-S219
DRAWING NO	
DATE	2021.02.19

R&D發行
2021.02.19
達立

RoHS
Compatible