


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

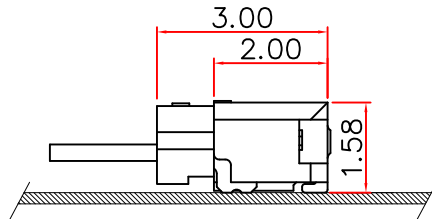



R&D發行
2020.04.16
達立

RoHS
Compatible

ORDER INFORMATION :
WB0612H-XX X X X
1 2 3 4 5

- 1.HALOGEN FREE
- 2.PIN NO.: 02~16
- 3.PACKING:
0 : TAPE & REEL
1 : TUBE
- 4.PLATING
S : MATT Sn 100u" Min.
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
- 5.COLOR
N : NATURAL
B : BLACK


RECOMMENED P.C.B MOUNTING
(PCB TOLERANCE ±0.05)

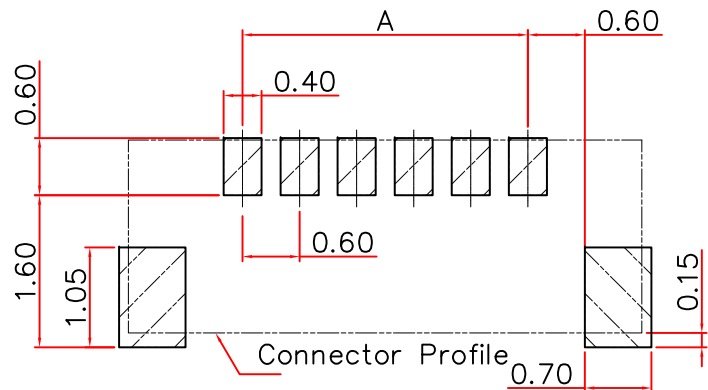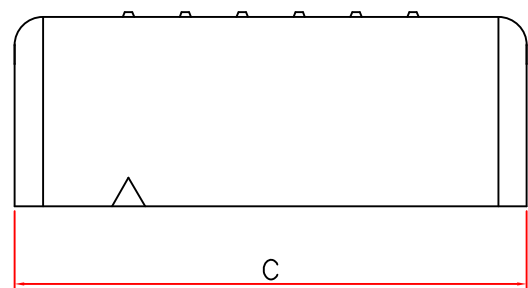

PIN NO.	Dimensions			
	A	B	C	D
2	0.60	1.36	3.00	2.35
4	1.80	2.56	4.20	3.55
6	3.00	3.76	5.40	4.75
8	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

Specifications

1. Current Rating : 0.2A(AWG #36)
0.3A(AWG #34)
2. Voltage Rating : 30V AC,DC
3. Contact resistance : 40mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Withstanding Voltage : 200V AC for one minute
6. Temperature Range : -25°C ~ +85°C

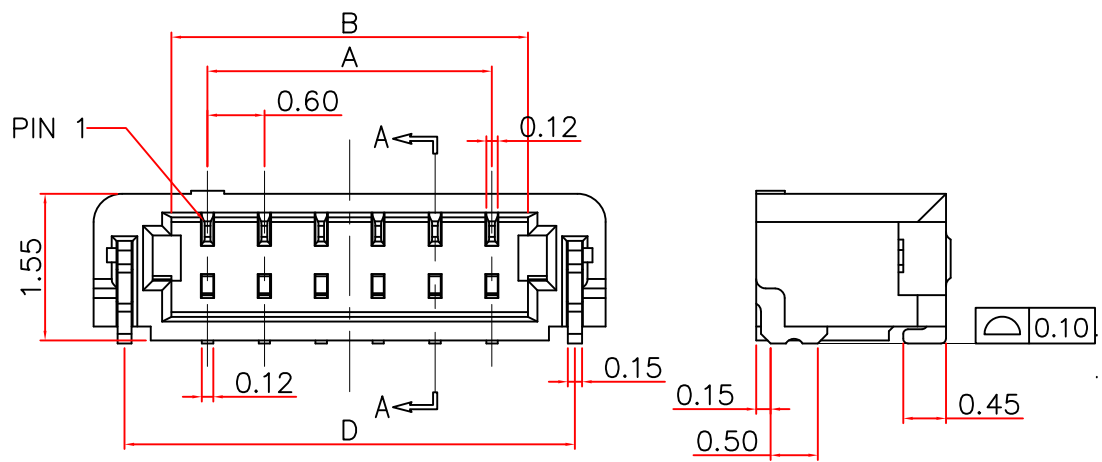

3	Nail	Brass	1	Ni Plated 50 u" Min., Matt Sn Plated 100 u" Min.
2	Terminal	Copper Alloy	1	—
1	Insulator	Thermoplastic	1	UL94V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 60mm PITCH
0 ——— ±0.50	PART NO	WB0612H-XXXXX
0.0 ——— ±0.25	DRAWING NO	
0.00 ——— ±0.15	DATE	2020.04.06
ANGLE ——— ±2°		