



RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.




SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute

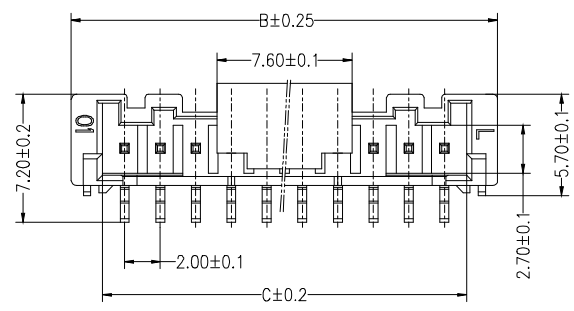


WB2012H - XX X X X
 B:BLACK
 N:NATURAL
 PLATING SPEC
 S:MATT Sn
 G:GOLD FLASH
 T:GOLD 3U" on contact area

PIN NO. PACKING:
 0:TAPE&REEL
 1:TUBE

PCB LAYOUT

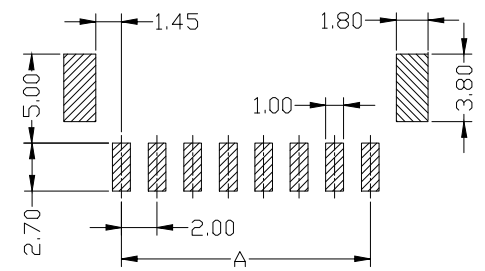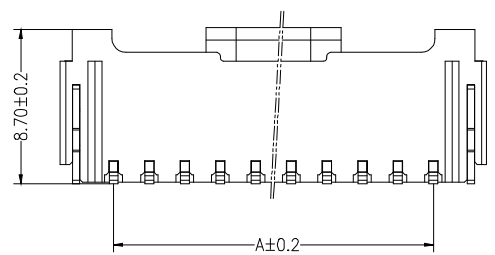

注：十孔及以上双卡插



注：六孔及以下无此槽

PIN.	DIM A	DIM B	DIM C
2pin	2.00	8.00	4.55
3pin	4.00	10.00	6.55
4pin	6.00	12.00	8.55
5pin	8.00	14.00	10.55
6pin	10.00	16.00	12.55
7pin	12.00	18.00	14.55
8pin	14.00	20.00	16.55
9pin	16.00	22.00	18.55
10pin	18.00	24.00	20.55
11pin	20.00	26.00	22.55
12pin	22.00	28.00	24.55
13pin	24.00	30.00	26.55
14pin	26.00	32.00	28.55
15pin	28.00	34.00	30.55

達立科技股份有限公司
Dawning Precision Co., Ltd.
 TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Honda	SCALE		
DRAWING	Honda	UNIT	mm	
CHECK	Honda	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 2.00mm Pitch
0 _____ ±0.35	PART NO	WB2012H SERIES
0.0 _____ ±0.25	DRAWING NO	
0.00 _____ ±0.15	DATE	2020.04.16
ANGLE _____ ±3°		