



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2018.02.01
達立


RoHS
Compatible

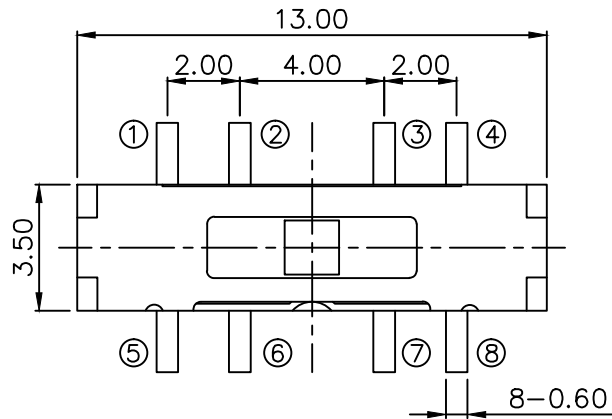

CIRCUIT DIAGRAM





RECOMMENED P.C.B MOUNTING
PATTERN DIMENSION

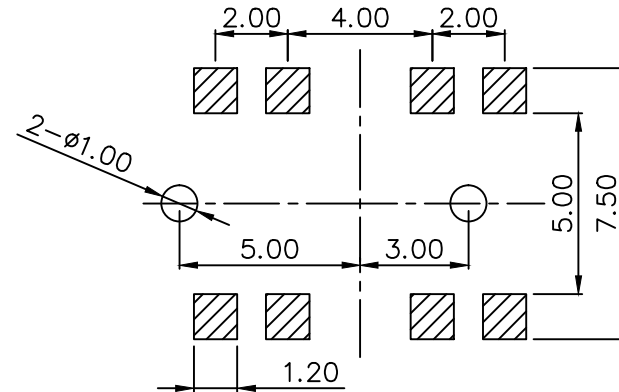

Specifications

- Rating : DC 12V, 0.1A.
- Travel : 2.0±0.2mm
- Contact resistance : 100mΩ Max.
- Insulation resistance : 100MΩ
- Operating force
L ← C → R : 250±100gf
L → C ← R : 300±150gf
- Operating life : 10,000 cycles.

5	Stem	PA46	1	White
4	Cover	SUS	1	—
3	Contact spring	Phosphor Bronze	1	Ag Plated
2	Terminal	Phosphor Bronze	1	Ag Plated
1	Case	LCP	1	Black
No.	Part Name	Material	Q'ty	Finishing

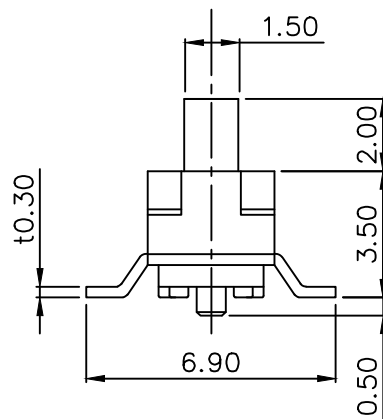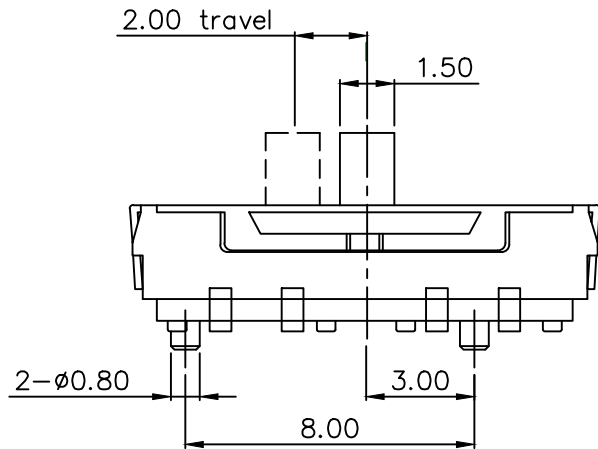

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
0 — ±0.50	PART NO	SS-F36S-S085
0.0 — ±0.40	DRAWING NO	
0.00 — ±0.30	DATE	2018/02/01
ANGLE — ±2'		