




RoHS
Compatible

Order Information:
PJ-373D-S057


Circuit Diagram




ZONE	REV	DESCRIPTION	DATE	APPD.

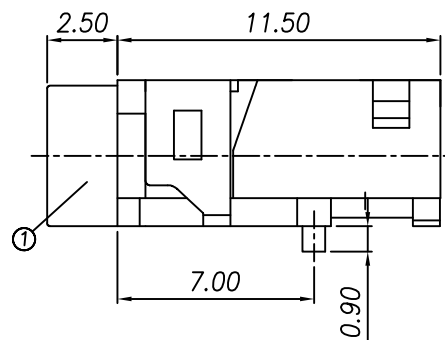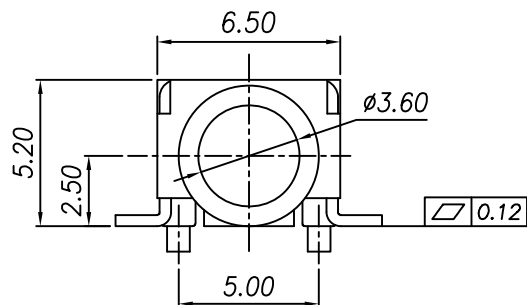

MODEL NO.	PJ-3733D-S057
SCHEMATIC	

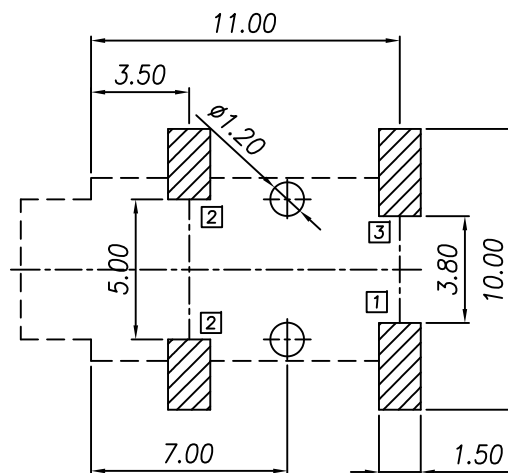

P.C.B Layout
(Copper-Sided View)

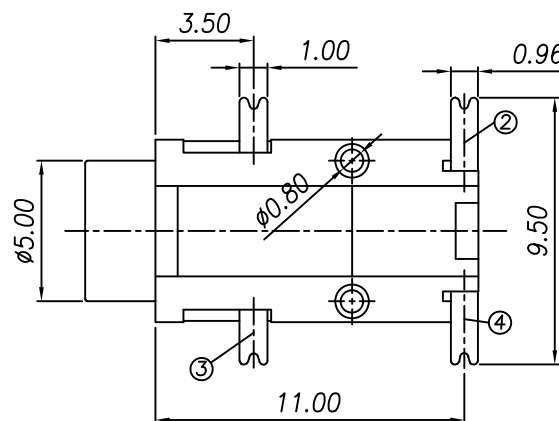

Specifications

1. Rating : 30V 0.5A Max.
2. Contact resistance: 30mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3~30N
6. Life test : 5,000 cycles
7. Operating temperature : -20°C~70°C

④	Ring Spring	③	Phosphor Bronze t=0.2	1	Ag Plated
③	Tip Spring	②	Phosphor Bronze t=0.4	1	Ag Plated
②	Earth Terminal	①	Phosphor Bronze t=0.2	1	Ag Plated
①	Housing		PA9T,UL 94V-0	1	Black
No.	Part Name		Material	Q"ty	Finishing

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE	
DRAWING	Will	UNIT	mm
CHECK	Will	SIZE	A4: 210*297
APPROVAL	Eric	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PHONE JACK
less than 10 ±0.2	PART NO	PJ-373D-S057 SERIES
10~30 ±0.3	DRAWING NO	
30~100 ±0.5	DATE	2011/08/03
ANGIE ±2°		