




RoHS
Compatible



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

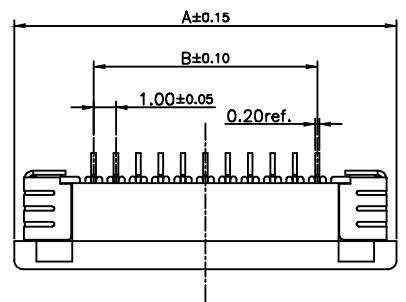


Section A-A

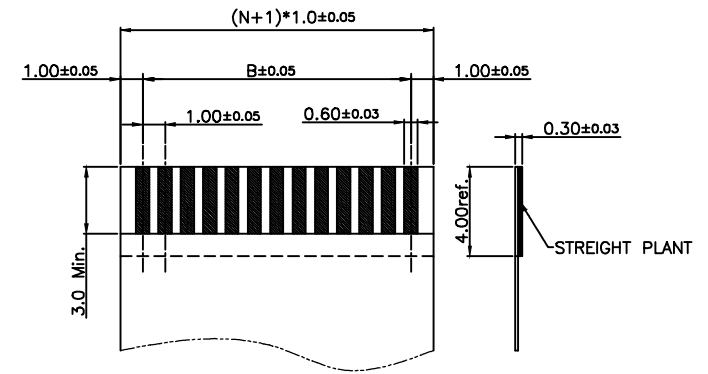

RECOMMENED FFC/FPC

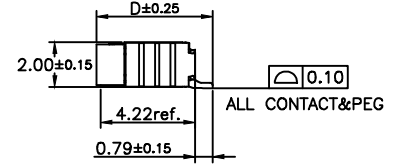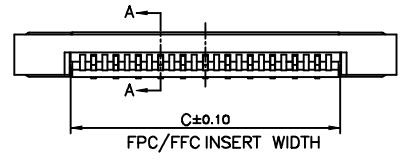


ALL CONTACT&PEG

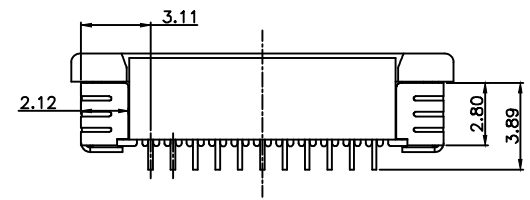

Order information :
FP1011H-XXX X X X-L
1 2 3 4 5 6

Specifications

1. Current Rating : 0.5A AC/DC
2. Votage Rating : 50V AC/DC
3. Operating temperature : -45°C~+85°C

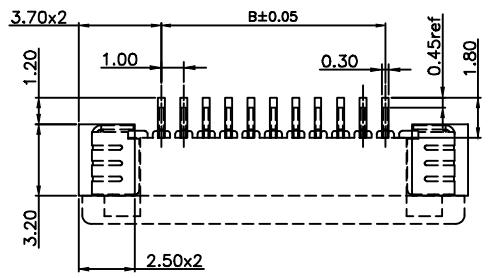

RECOMMENED P.C.B LAYOUT

1. With "H" : Halogen free
2. Pin No.
3. Packing :
0 = Tape & Reel
1 = Tube
4. Plating spec :
M = MATTE Sn
G = Gold flash
5. Color :
0 = Housing(Nature)+Cover(Black)
Contact type :
L = Lower contact

N = 030	A = 36.10	B = 29.00	C = 31.06	N<=16 D=5.20 N>=17 D=5.75
N	A = B+7.10	B = (N-1)*1.00	C = B+2.06	
N = 004	A = 10.01	B = 3.00	C = 5.06	
PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
4	Peg	Copper alloy	1	
3	Contact	Copper alloy	1	
2	Cover	High-temp	1	UL94 V-0
1	Housing	High-temp	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	FPC 1.0mm Pitch 2.0H
0 ±0.35	PART NO	FP1011H-L Series
0.0 ±0.25	DRAWING NO	
0.00 ±0.15	DATE	2020.02.26
ANGLE ±3°		