

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

F

E

D


C

B






A

**RoHS**  
**Compatible**

RECOMMENDED P.C.B MOUNTING  
PATTERN DIMENSION

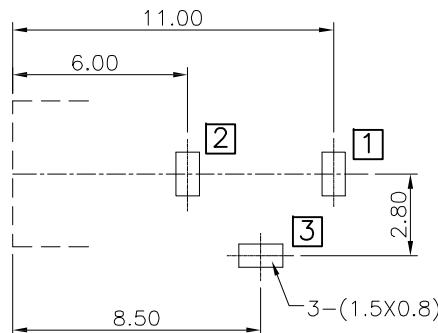

R&D發行  
2022.08.18  
達立

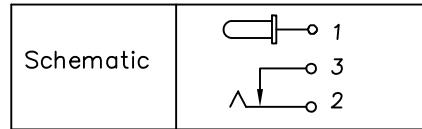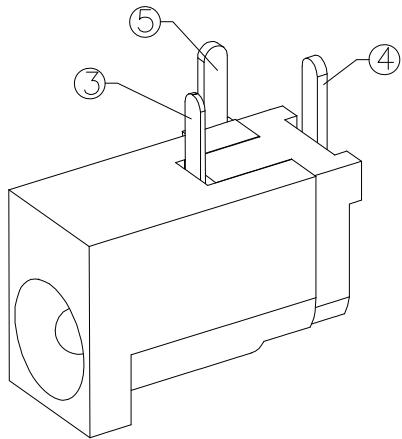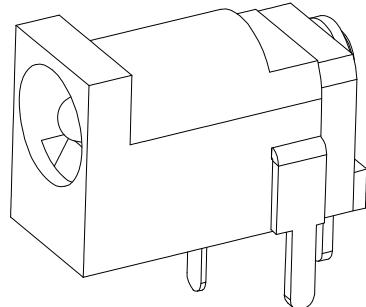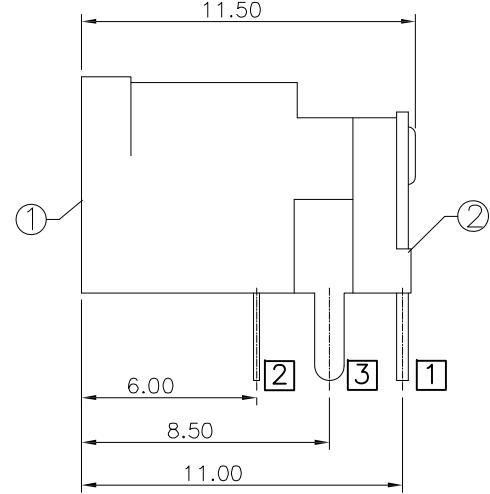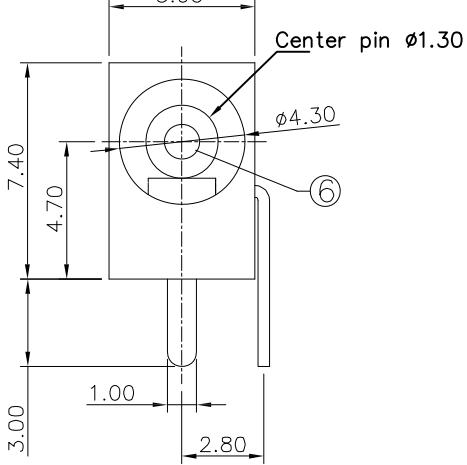

SPECIFICATIONS :

1. Rating : DC 16V, 3.5A.
2. Contact resistance : 50mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Withstand voltage : 500V AC.
5. Insertion&withdrawal force : 0.3~3.0 Kgf
6. Life : 5000 Cycles Min.

6	Pin	Brass	1	Ni Plated
5	Flat Foot	Brass	1	Ag Plated
4	Curve Piece	Brass	1	Ag Plated
3	Spring Piece	SUS	1	Ag Plated
2	Cover	PBT	1	Black
1	Housing	PBT	1	Black
No.	Part Name	Material	Q'ty	Finishing

DESIGN	Chung	SCALE	mm		TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DC POWER SOCKET
DRAWING	Chung	UNIT	mm		0 ±0.50 0.0 ±0.40 0.00 ±0.30 ANGLE ±2°	PART NO	DC-009H-1-C-S243
CHECK	Chung	SIZE	A4: 210*297			DRAWING NO	
APPROVAL	Baker	VERSION	01			DATE	2022.08.18

達立科技股份有限公司  
Dawning Precision Co.,Ltd.  
TEL: 886-2-82271388 FAX: 886-2-82272198