

RoHS
Compatible

R&D發行
2020.04.06
達立

ORDER INFORMATION :
WB0611H-XX X X X
1 2 3 4 5

1. HALOGEN FREE
2. PIN NO.: 02~16
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn 100u" Min.
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK







PIN NO.	Dimensions			
	A	B	C	D
2	1.36	1.80	0.60	1.65
4	2.56	3.00	1.80	2.85
5	3.16	3.60	2.40	3.45
6	3.76	4.20	3.00	4.05
8	4.96	5.40	4.20	5.25
10	6.16	6.60	5.40	6.45
12	7.36	7.80	6.60	7.65
16	9.76	10.20	9.00	10.05

Specifications

- Current Rating : 0.2A(AWG #36)
0.3A(AWG #34)
- Voltage Rating : 30V AC,DC
- Contact resistance : 40mΩ Max.
- Insulation resistance : 100MΩ Min.
- Withstanding Voltage : 200V AC for one minute
- Temperature Range : -25°C ~ +85°C
- Insulation O.D.: $\phi 0.29 \pm 0.02$ mm(AWG#36)
 $\phi 0.32 \pm 0.02$ mm(AWG#34)


2	Terminal	Copper Alloy	1	—
1	Insulator	Thermoplastic	1	UL94V-0
No.	Part Name	Material	Qty	Finishing

ZONE	REV	DESCRIPTION	DATE	APPD.

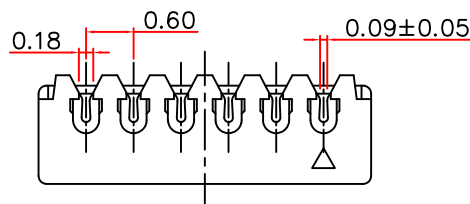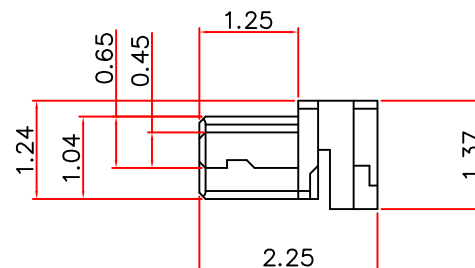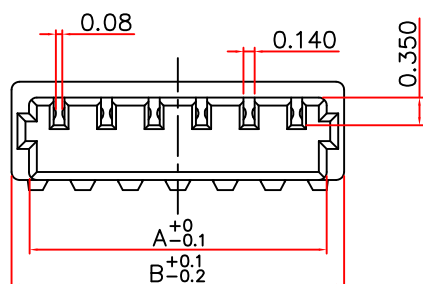

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Honda	VERSION	01



TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB PLUG 0.60mm PITCH
0 — ±0.50	PART NO	WB0611H-XXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.06
ANGLE — ±2°		