


Order information :
 BT0402-PXXX-061 G R -S219
 1 2 3 4

1. Pin No.: 010~044
2. Housing high
061=0.61
3. Plating
G = Au
4. Packing :
R = Tape & Reel

R&D發行
 2021.02.19
 達立

RoHS
Compatible




RECOMMENED P.C.B LAYOUT

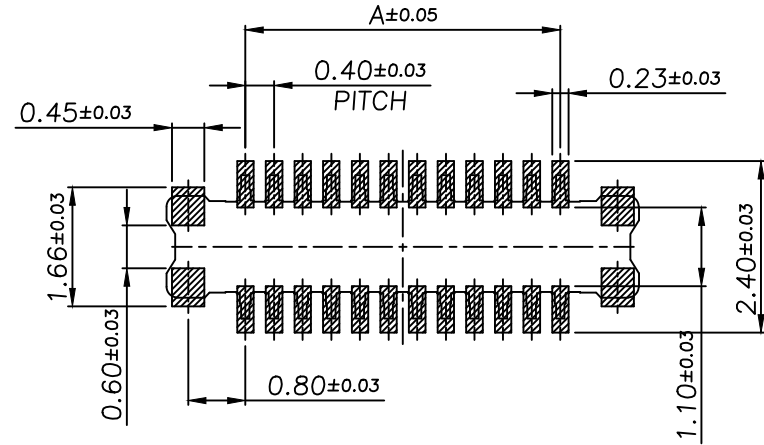



Dimension table(mm)

※: Mass Production

No. of contacts	Dimension	
	A	B
10	1.60	3.80
12	2.00	4.20
14	2.40	4.60
16	2.80	5.00
18	3.20	5.40
20	3.60	5.80
22	4.00	6.20
24	4.40	6.60
26	4.80	7.00
30	5.60	7.80
34	6.40	8.60
40	7.60	9.80
44	8.40	10.60

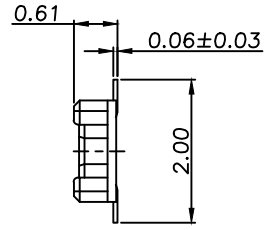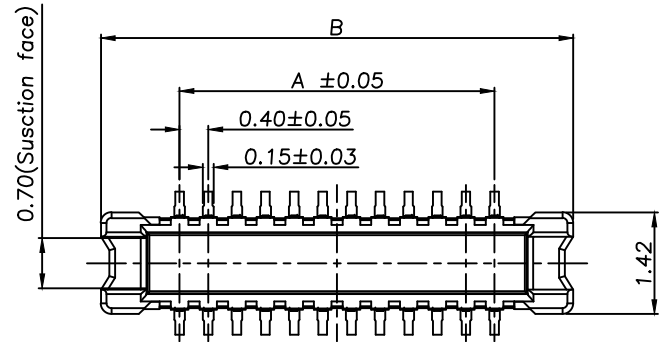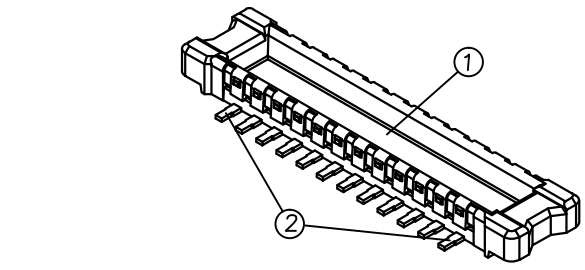

Matting drawing

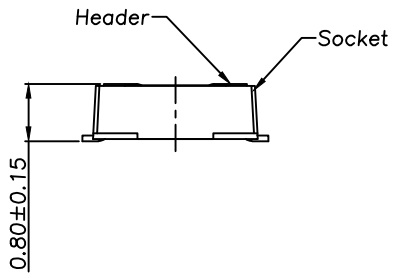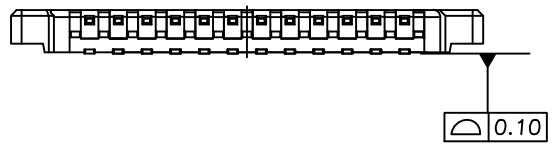

Specifications

1. Rating : 30V AC/DC, 0.5A
2. Contact resistance : 80mΩ Max.
3. Insulation resistance : 1000MΩ Min.
4. Dielectric withstanding voltage: 150 V(AC) for 1 min.
5. Operating Temp. : -55°C~85°C

2	Contact	Copper Alloy	XX	Au Plated
1	Housing	High-Temp Thermoplastic	1	Black
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
 TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	John	SCALE	
DRAWING		UNIT	mm
CHECK	John	SIZE	A4: 210*297
APPROVAL	John	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	BTB 0.4mm Male SMT
0 — ±0.50	PART NO	BT0402-PXXX-061GR-S219
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2021.02.19
ANGLE — ±3°		