

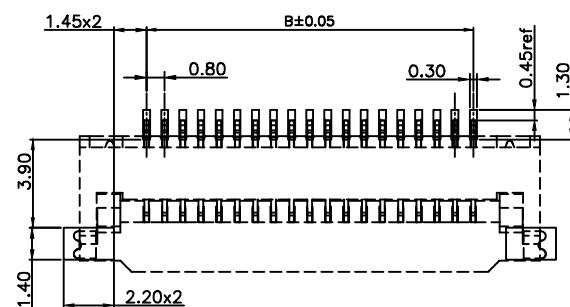
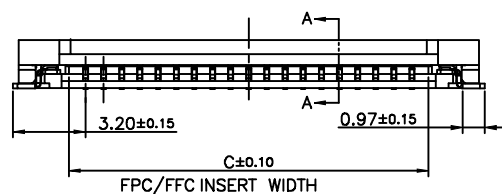



RoHS
Compatible

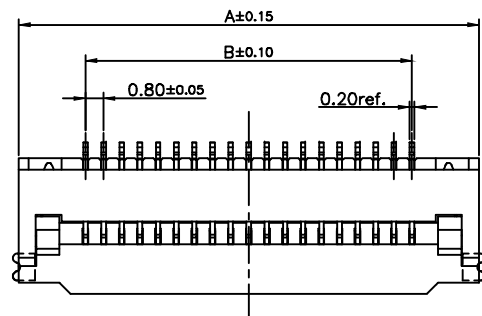


RECOMMENED P.C.B LAYOUT



Section A-A

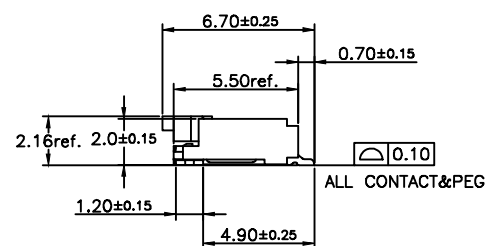

ALL CONTACT&PEG

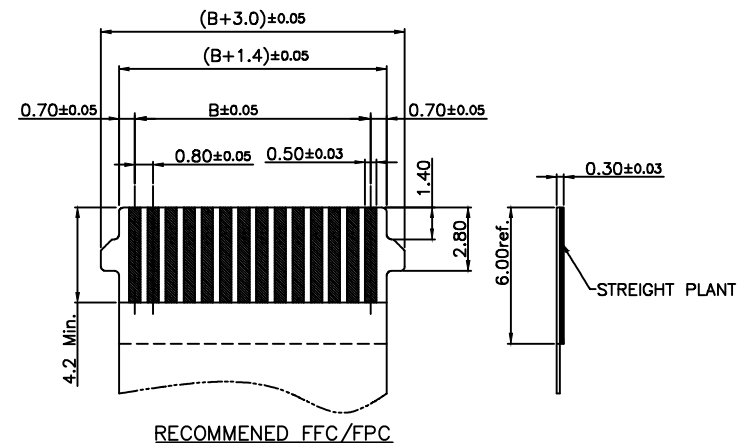

RECOMMENED FFC/FPC

Order information :
FP0812H-XXX X X X

1 2 3 4 5

1. With "H" : Halogen free
2. Pin No.
3. Packing :
0 = Tape & Reel
1 = Tube
4. Plating spec :
M = MATTE Sn
G = Gold flash
0 = Gold flash on contact area
and Matte Sn solder area
5. Color :
0 = Housing(Nature)+Cover(Black)

Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 50V AC/DC
3. Operating temperature : -45°C~+85°C

N = 034	A = 32.30	B = 26.40	C = 27.86
N	A = B+5.90	B = (N-1)*0.80	C = B+1.46
N = 004	A = 8.30	B = 2.40	C = 3.86
PIN NO.	DIM. A	DIM. B	DIM. C

4	Peg	Copper alloy	1	——
3	Contact	Copper alloy	1	——
2	Cover	High-temp	1	UL94 V-0
1	Housing	High-temp	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	FPC 0.8mm Pitch 2.0H
0 ±0.35	PART NO	FP0812H Series
0.0 ±0.25	DRAWING NO	
0.00 ±0.15	DATE	2020.02.26
ANGLE ±3°		