

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RECOMMENDED P.C.B MOUNTING  
(PCB TOLERANCE ±0.05)


R&D發行  
2020.04.01  
達立

**RoHS**  
Compatible

PIN NO.	Dimensions			
	A	B	C	D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

ORDER INFORMATION :  
WB0811H-XX X X X  
1 2 3 4 5

1. HALOGEN FREE
2. PIN NO.: 02~20
3. PACKING:  
0 : TAPE & REEL  
1 : TUBE
4. PLATING  
S : MATT Sn 100u" Min.  
G : GOLD FLASH  
T : GOLD 3u" ON CONTACT AREA
5. COLOR  
N : NATURAL  
B : BLACK

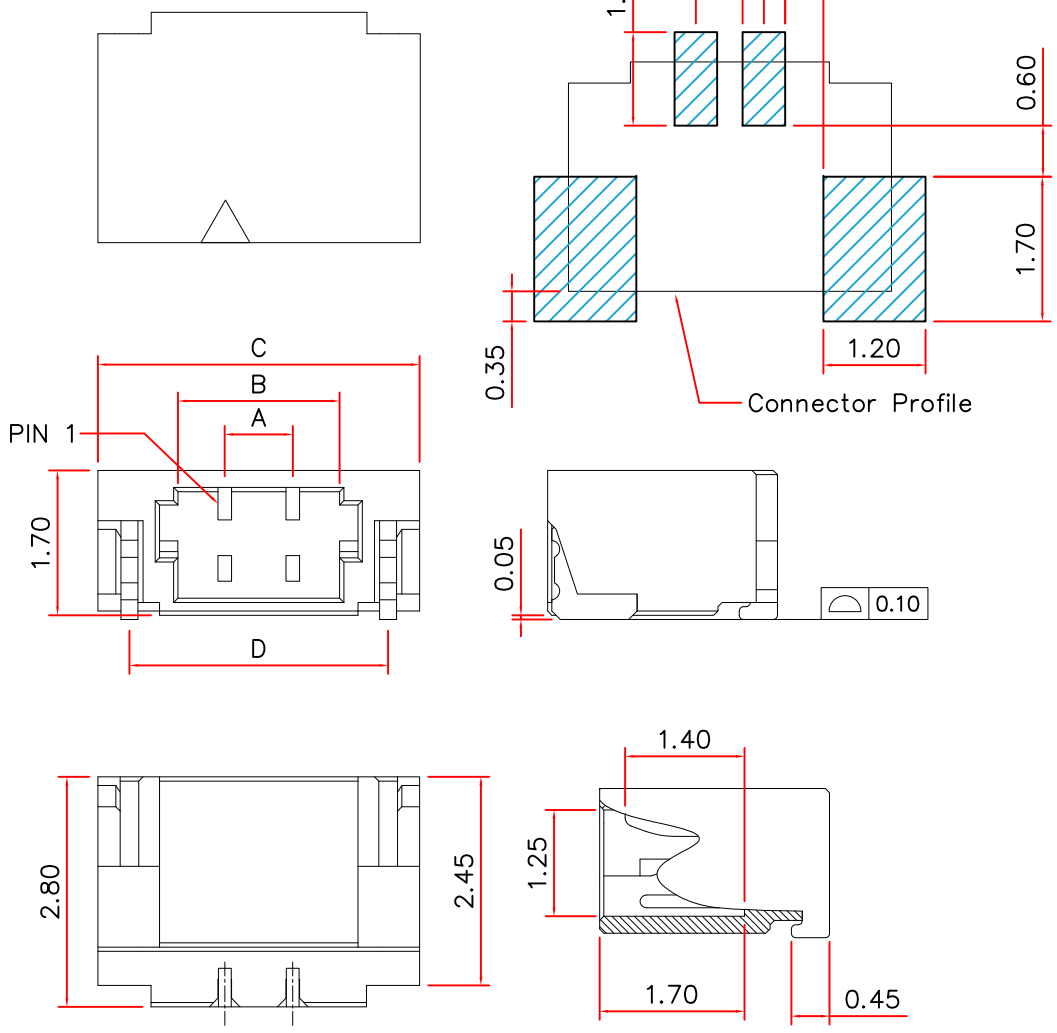

Specifications

1. Current Rating : 0.7A(AWG #32)  
0.3A(AWG #34~36)
2. Voltage Rating : 30V AC,DC
3. Contact resistance : 30mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Withstanding Voltage : 200V AC for one minute
6. Temperature Range : -25°C ~ +85°C

No.	Part Name	Material	Qty	Finishing
3	Fitting Nail	Copper Alloy	1	—
2	Terminal	Copper Alloy	1	—
1	Insulator	High-Temp Thermoplastic	1	UL94V-0

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 0.80mm PITCH
0 — ±0.50	PART NO	WB0811H-XXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.01
ANGLE — ±2°		