



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D
2018.11.29
達立




RoHS
Compatible

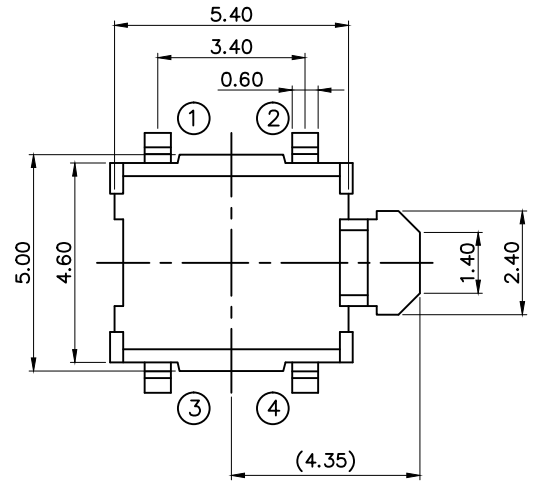

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

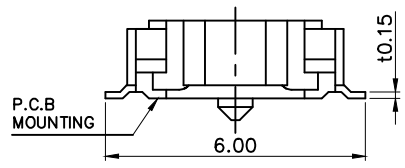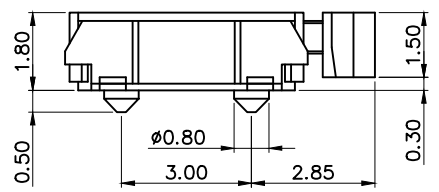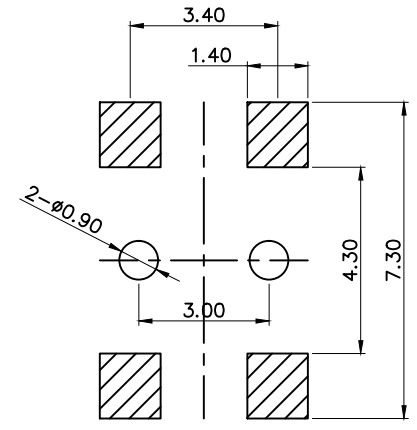

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 0.20±0.15mm
3. Contact resistance : 500mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 180±100gf
6. Operating life : 50,000 cycles Min.

7	Dust cover	Polyimide	1	—
6	Block	LCP	1	Black
5	Stem	LCP	1	Black
4	Cover	Stainless steel	1	—
3	Contact	Stainless steel	1	Ag Clad
2	Terminal	Copper alloy	1	Ag Plated
1	Case	LCP	1	Black
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
0 — ±0.50	PART NO	TSS11-EF-180-T20-S016
0.0 — ±0.40	DRAWING NO	
0.00 — ±0.30	DATE	2018/11/29
ANGLE — ±3°		