

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RECOMMENDED P.C.B MOUNTING
(PCB TOLERANCE ±0.05)





R&D發行
2020.04.16
達立

RoHS
Compatible

ORDER INFORMATION :

WB1012H-XX X X X
1 2 3 4 5

1. HALOGEN FREE
2. PIN NO.: 16~50
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn 100~150u"
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK

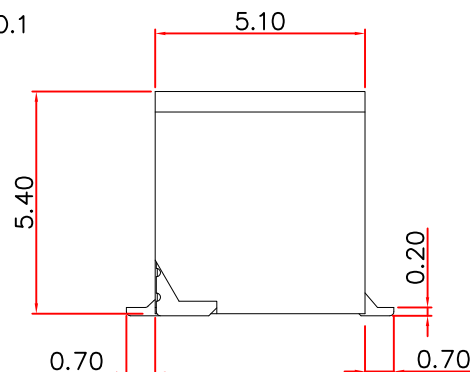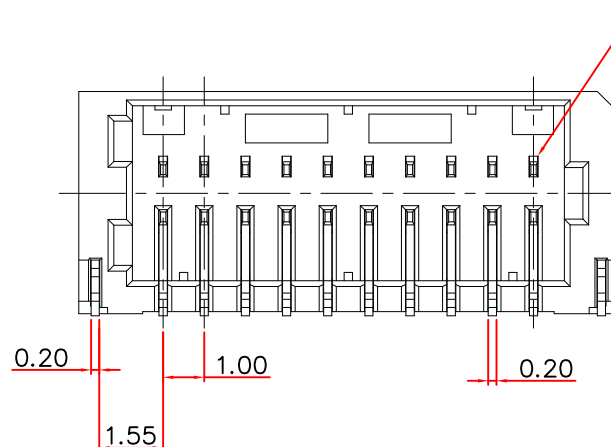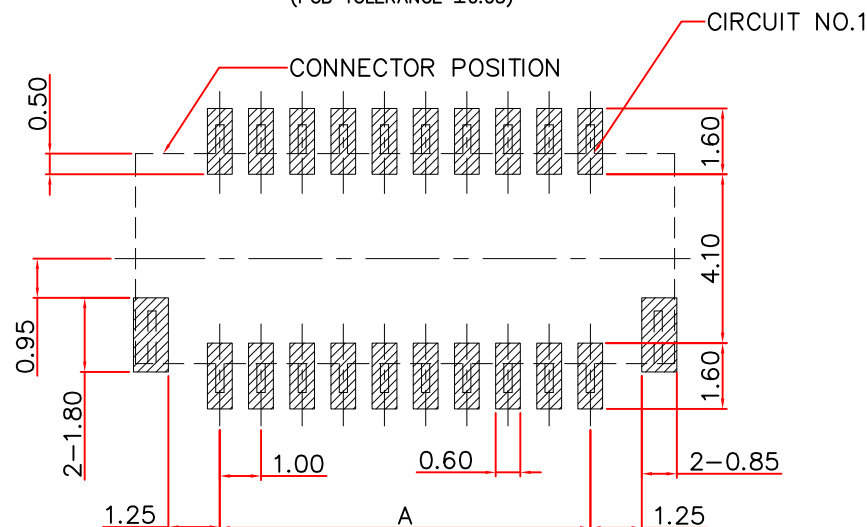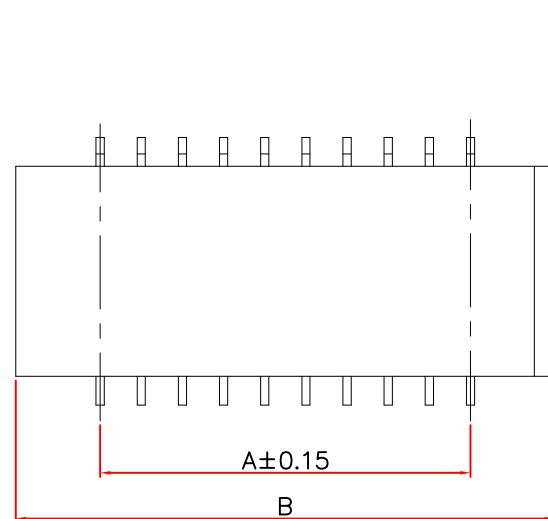

PIN NO.	Dimensions		
	A	B	C
16	7.00	11.10	8.40
20	9.00	13.10	10.40
30	14.00	18.10	15.40
34	16.00	20.10	17.40
40	19.00	23.10	20.40
50	24.00	28.10	25.40

3	Fitting Nail	Copper Alloy	1	—
2	Terminal	Copper Alloy	1	—
1	Insulator	LCP	1	UL 94-V0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Honda	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 1.00mm PITCH
0 — ±0.50	PART NO	WB1012H-XXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.16
ANGLE — ±2°		