
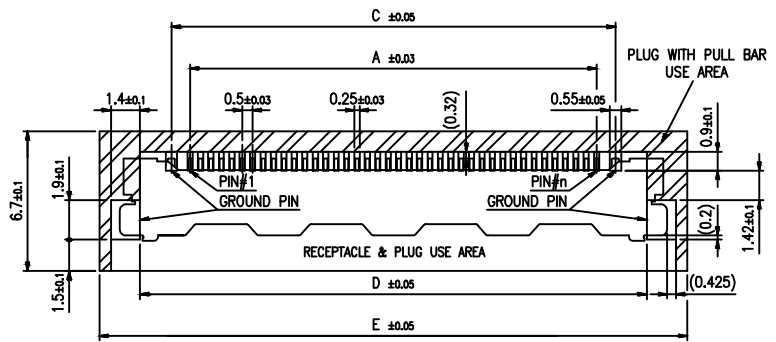
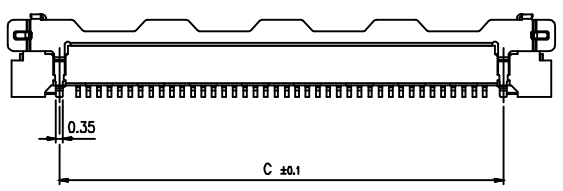

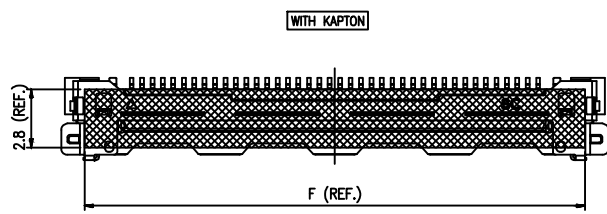


RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

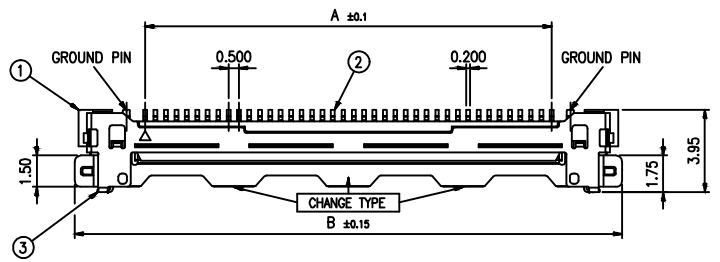

RECOMMENED P.C.B LAYOUT

Order information :
LV0504(H)-XX X X 1 X X -G 3
1 2 3 4 5 6

- Without "H" : With Halogen
With "H" : Halogen free
- Pin No.
- Shell Plating :
0 = Au Plated
1 = Gold flash on solder area
- KAPTON :
0 = Without kapton
1 = With kapton
- Packing spec :
0 = PH8 / Width 44
1 = PH12 / Width 44 (30P)
2 = PH8 / Width 32 (30P)
- Packing :
R = Tape & Reel

Pin No.	A	B	C	D	E	F
30	14.50	21.25	16.30	19.30	23.20	19
40	19.50	26.25	21.30	24.30	28.20	24

3	Shell	Copper alloy	1	_____
2	Contact	Copper alloy	1	_____
1	Housing	High-temp	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	LVDS CONNECTOR
0 _____ ±0.35	PART NO	LV0504-XXXXX Series
0.0 _____ ±0.25	DRAWING NO	
0.00 _____ ±0.15	DATE	2020.02.26
ANGLE _____ ±3°		