


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RD&發行
2025.12.03
達立


RoHS
Compatible

CIRCUIT DIAGRAM



第一段(L) : ① ② / ⑤ ⑥
第二段(C) : ② ③ / ⑥ ⑦
第三段(R) : ② ④ / ⑥ ⑧

RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

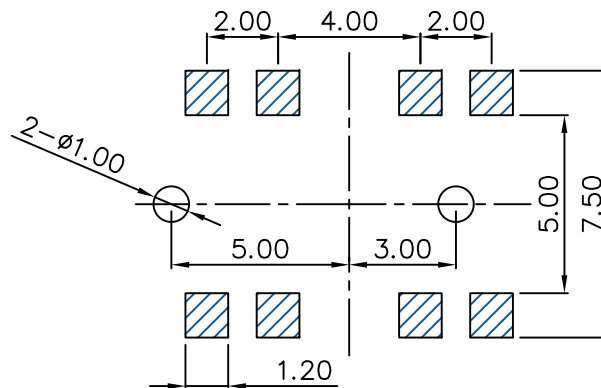

Specifications

1. Rating : DC 12V, 0.1A.
2. Travel : 2.0±0.2mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ
5. Operating force : 200±100gf
6. Operating life : 10,000 cycles.

5	Stem	PA46,HB	1	Black
4	Cover	SUS	1	—
3	Contact spring	Phosphor Bronze	1	Ag Plated
2	Terminal	Phosphor Bronze	1	Ag Plated
1	Case	LCP,UL94-V0	1	Black
No.	Part Name	Material	Q'ty	Finishing

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
0 ——— ±0.50	PART NO	SS-F36S-BK-S085
0.0 ——— ±0.40	DRAWING NO	
0.00 ——— ±0.30	DATE	2025.12.03
ANGLE ——— ±2°		

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Baker	VERSION	06

