


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.



ORDER INFORMATION :
 FP10251-XX $\frac{0}{1} \times \frac{N}{234}$ -S209

1. PIN NO.: 04~40
 2. PACKING:
 0 : TAPE & REEL


3. PLATING
 G : GOLD FLASH
 SN : Bright Sn Plated

4. HOUSING COLOR
 N : NATURAL





RoHS
Compatible

R&D發行
 2020.10.21
 達立



- Specifications**
- Voltage Rating : 30V AC
 - Contact resistance : 0.03Ω Max.
 - Insulation resistance : 500MΩ Min.
 - Temperature Range : -25°C ~ +85°C
- Material**
- Housing : LCP , UL94V-0, Natural
 - Terminal : Copper Alloy
 - Actuator : LCP, UL94V-0 ,Black
 - Fitting Nail : Copper Alloy , Sn Plated

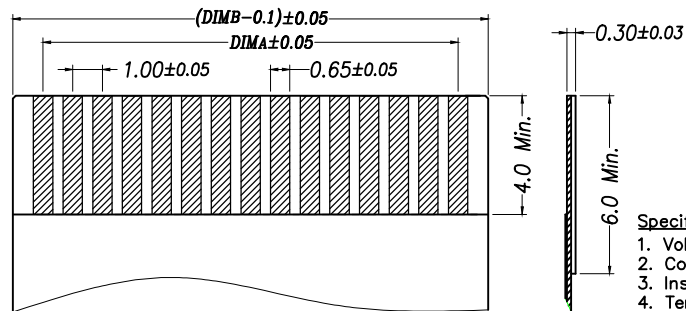

(Applicable Flat Cable)

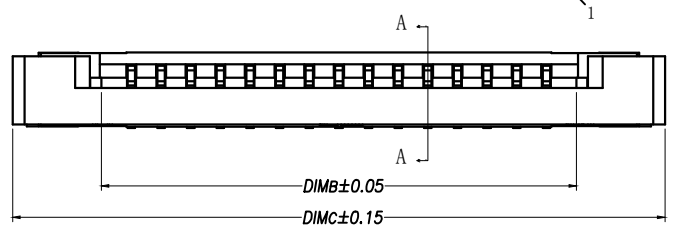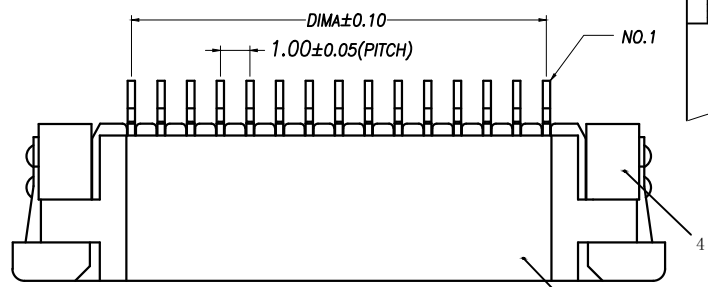

SECTION A-A

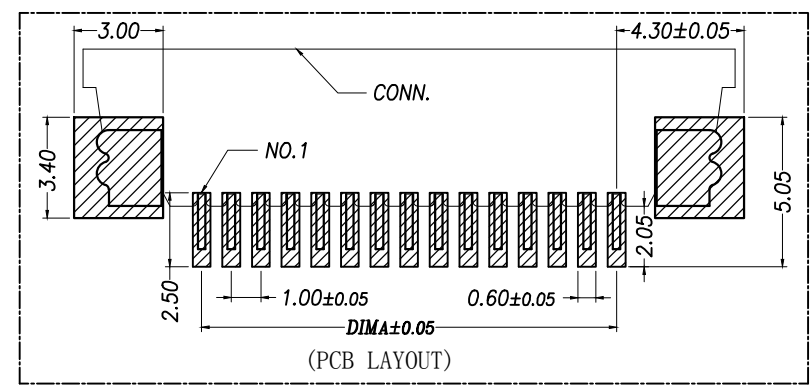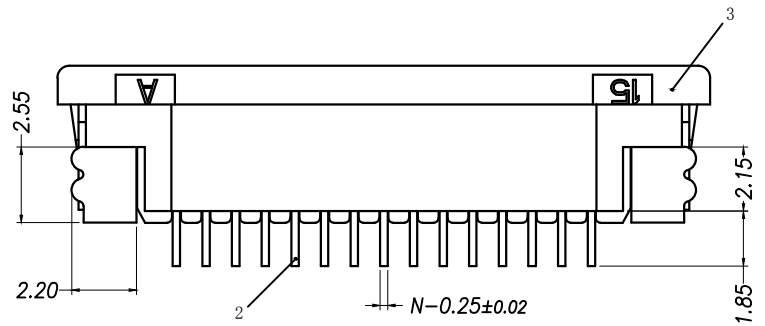

PIN NO.	Dimensions		
	A	B	C
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

達立科技股份有限公司
Dawning Precision Co., Ltd.
 TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	FPC 1.0mm PITCH SMT TYPE TOP CONN.
0 _____ ±0.30	PART NO	FP10251-XX0XN-S209
0.0 _____ ±0.20	DRAWING NO	
0.00 _____ ±0.10	DATE	2020/10/21
ANGLE _____ ±2°		