


RD&發行
2025.03.24
達立







RoHS
Compatible

ORDER INFORMATION :
WB0812H-XX X X X
1 2 3 4 5
1. HALOGEN FREE
2. PIN NO.: 02~24
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK




PIN NO.	Dimensions		
	A	B	C
2	0.80	1.78	2.40
3	1.60	2.58	3.20
4	2.40	3.38	4.00
5	3.20	4.18	4.80
6	4.00	4.98	5.60
7	4.80	5.78	6.40
8	5.60	6.58	7.20
9	6.40	7.38	8.00
10	7.20	8.18	8.80
11	8.00	8.98	9.60
12	8.80	9.78	10.40
13	9.60	10.58	11.20
14	10.40	11.38	12.00
15	11.20	12.18	12.80
16	12.00	12.98	13.60
17	12.80	13.78	14.40
18	13.60	14.58	15.20
19	14.40	15.38	16.00
20	15.20	16.18	16.80
21	16.00	16.98	17.60
22	16.80	17.78	18.40
23	17.60	18.58	19.20
24	18.40	19.38	20.00

- Specifications
- Current Rating : 0.7A AC,DC
 - Voltage Rating : 30V AC,DC
 - Contact resistance : 30mΩ Max.
 - Insulation resistance : 100MΩ Min.
 - Withstanding Voltage : 500V AC for one minute
 - Temperature Range : -25°C ~ +85°C
 - Applicable Wire : AWG #32
 - Insulation O.D.: $\varnothing 0.38 \pm 0.02$ mm

2	Terminal	Copper Alloy	1	—
1	Insulator	High-Temp Thermoplastic	1	UL94V-0
No.	Part Name	Material	Qty	Finishing

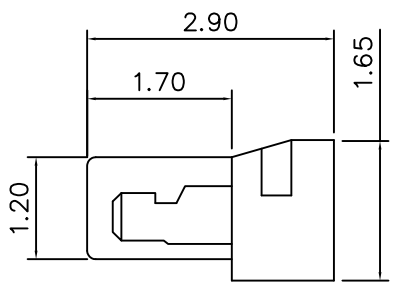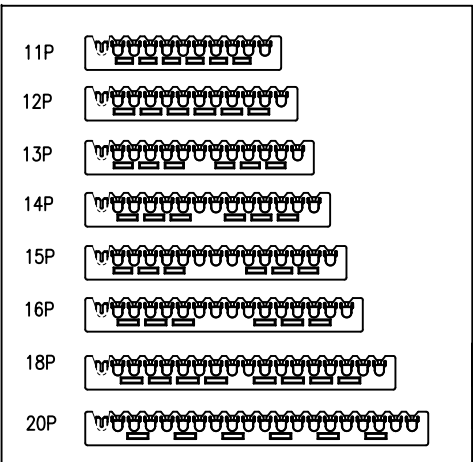

0.80



0.15

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Baker	VERSION	03

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	WTB PLUG 0.80mm PITCH
0	±0.50	PART NO	WB0812H-XXXXX
0.0	±0.30	DRAWING NO	
0.00	±0.25	DATE	2025.03.24
ANGLE	±2°		