


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.



R&D發行  
2020.05.04  
達立

**RoHS**  
**Compatible**

ORDER INFORMATION :  
WB2008H-H  $\frac{XXX}{1}$   $\frac{X}{2}$   $\frac{X}{3}$   
1. HALOGEN FREE  
2. PIN NO.: 002~016  
3. COLOR  
N : NATURAL  
B : BLACK

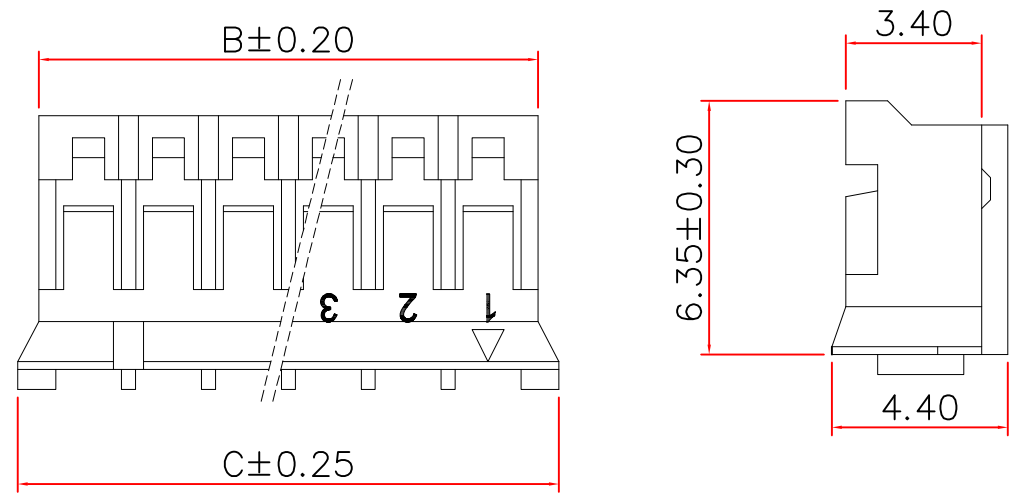

PIN NO.	Dimensions		
	A	B	C
2	2.00	4.50	5.70
3	4.00	6.50	7.70
4	6.00	8.50	9.70
5	8.00	10.50	11.70
6	10.00	12.50	13.70
7	12.00	14.50	15.70
8	14.00	16.50	17.70
9	16.00	18.50	19.70
10	18.00	20.50	21.70
11	20.00	22.50	23.70
12	22.00	24.50	25.70
13	24.00	26.50	27.70
14	26.00	28.50	29.70
15	28.00	30.50	31.70
16	30.00	32.50	33.70

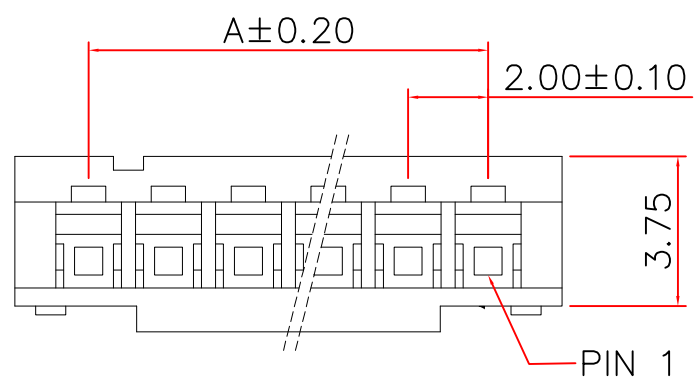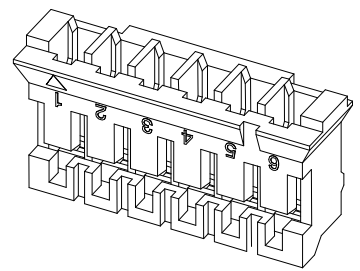

**Specifications**

1. Current Rating : 2.0A AC,DC
2. Voltage Rating : 250V AC,DC
3. Contact resistance : 20mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Withstanding Voltage : 800V AC for one minute
6. Temperature Range : -25°C ~ +85°C

1	Insulator	PA66	1	UL94-V0
No.	Part Name	Material	Qty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB PLUG 2.00mm PITCH
0 _____ ±0.50	PART NO	WB2008H-HXXXX
0.0 _____ ±0.25	DRAWING NO	
0.00 _____ ±0.15	DATE	2020.05.04
ANGLE _____ ±2°		