





△					
△					
△					
△					
ZONE	REV	DESCRIPTION	DATE	APPD.	

R&D發行
2019.07.16
達立


RoHS
Compatible

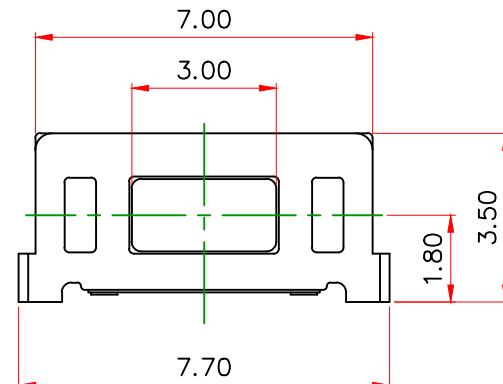

CIRCUIT DIAGRAM

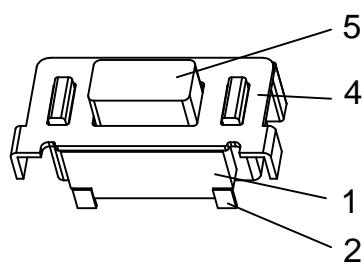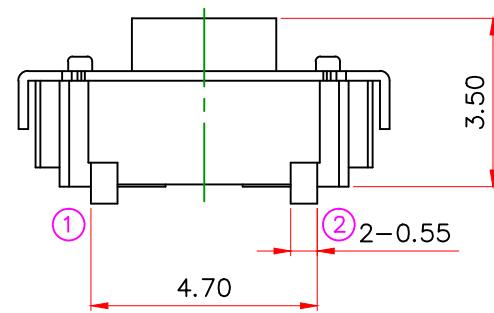

RECOMMENDED P.C.B MOUNTING PATTERN DIMENSION

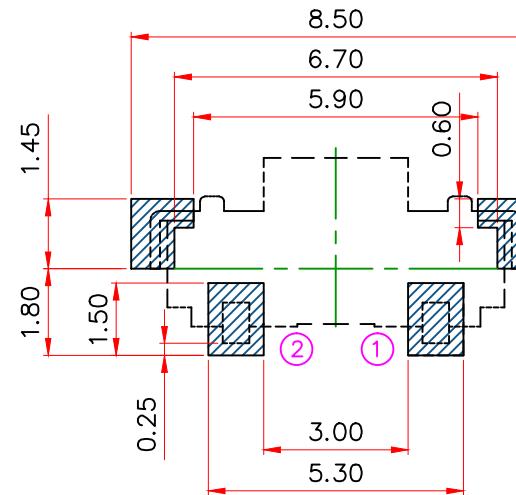

Specifications

- Rating : DC 12V, 50mA.
- Travel : 0.20 ± 0.1 mm
- Contact resistance : 100mΩ Max.
- Insulation resistance : 100MΩ Min.
- Operating force : 160 ± 50 gf
- Operating life : 50,000 cycles Min.

5	Stem	PPA	1	Black
4	Cover	Brass	1	Ag Plated
3	Contact	SUS	1	Ag Clad
2	Terminal	Brass	1	Ag Plated
1	Case	PA6T	1	White

No.	Part Name	Material	Q'ty	Finishing
				TACT SWITCH
				TS-A12-2-S085