

**RoHS**  
Compatible

發行  
2012.11.30  
達立

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Order Information:  
PJ-283\_D--S057


Housing & Cover Color :

No.	Color
Blank	Black
PI	Pink(701C)
OR	Orange(157C)
Y	Yellow(108U)
GR	Green(577C)
BL	Blue(284C)


Circuit Diagram

Specifications

1. Rating : 30V 0.5A Max.
2. Contact resistance: 50mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles Min.
7. Operating temperature : -20°C~70°C



⑥	Shunt Terminal	⑤	Phosphor Bronze	1	Ag Plated
⑤	Shunt Terminal	④	Phosphor Bronze	1	Ag Plated
④	Ring Spring	③	Stainless Steel	1	Ag Plated
③	Tip Spring	②	Phosphor Bronze	1	Ag Plated
②	Earth Terminal	①	Stainless Steel	1	Ag Plated
①	Housing		PA9T	1	
No.	Part Name		Material	Q'ty	Finishing

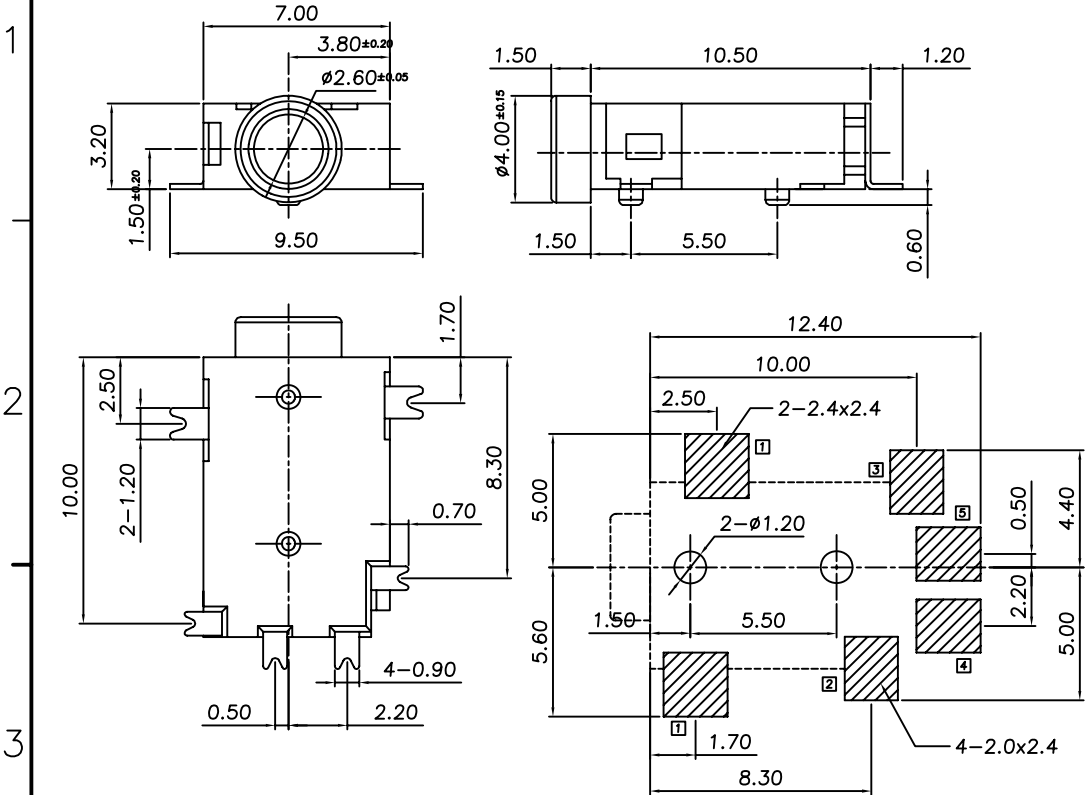

P.C.B Layout  
(Top View)

Model No.	PJ-2835D	PJ-2834AD	PJ-2834BD	PJ-2833D
Schematic				

□ Terminal No.

**達立科技股份有限公司**  
Dawning Precision Co., Ltd.  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PHONE JACK
less than 10 ±0.3	PART NO	PJ-283D-S057 SERIES
10~30 ±0.4	DRAWING NO	
30~100 ±0.5	DATE	2012/11/30
ANGIE ±2°		