


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RECOMMENDED P.C.B. MOUNTING
(PCB TOLERANCE ±0.05)

R&D發行
2020.04.10
達立

RoHS
Compatible

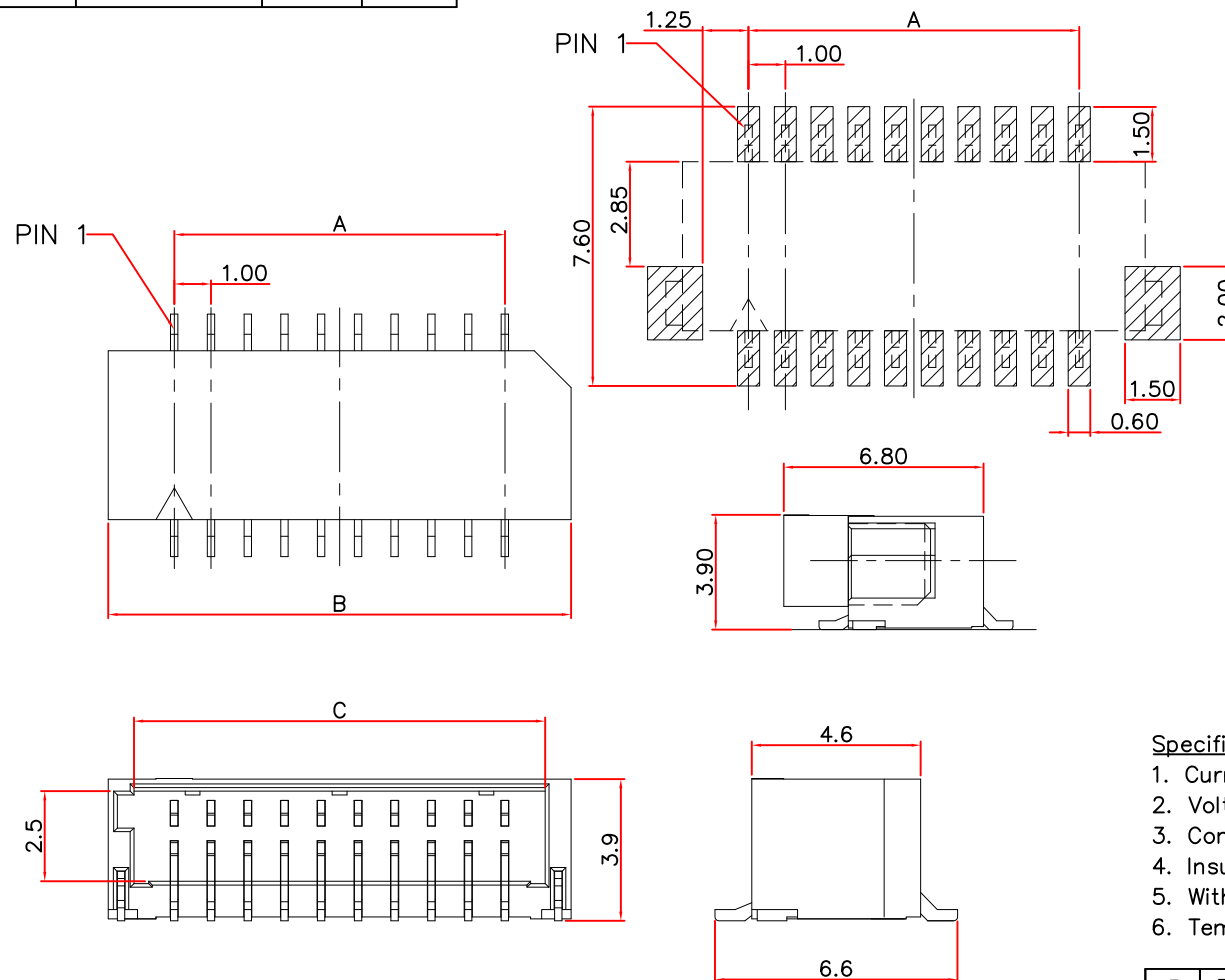

PIN NO.	Dimensions		
	A	B	C
6	2.00	5.60	4.20
8	3.00	6.60	5.20
10	4.00	7.60	6.20
12	5.00	8.60	7.20
14	6.00	9.60	8.20
16	7.00	10.60	9.20
18	8.00	11.60	10.20
20	9.00	12.60	11.20
22	10.00	13.60	12.20
24	11.00	14.60	13.20
26	12.00	15.60	14.20
28	13.00	16.60	15.20
30	14.00	17.60	16.20
32	15.00	18.60	17.20
34	16.00	19.60	18.20
36	17.00	20.60	19.20
38	18.00	21.60	20.20
40	19.00	22.60	21.20
42	20.00	23.60	22.20
44	21.00	24.60	23.20
46	22.00	25.60	24.20
48	23.00	26.60	25.20
50	24.00	27.60	26.20

ORDER INFORMATION :

WB1007H-XX X X X
1 2 3 4 5

1. HALOGEN FREE
2. PIN NO.: 06~50
3. PACKING:
0 : TAPE & REEL
1 : TUBE
4. PLATING
S : MATT Sn 100u" Min.
G : GOLD FLASH
T : GOLD 3u" ON CONTACT AREA
5. COLOR
N : NATURAL
B : BLACK

Specifications

1. Current Rating : 1A AC,DC
2. Voltage Rating : 50V AC,DC
3. Contact resistance : 20mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Withstanding Voltage : 250V AC for one minute
6. Temperature Range : -25°C ~ +85°C

3	PEG	Copper Alloy	1	—
2	Terminal	Copper Alloy	1	—
1	Insulator	High-Temp Thermoplastic	1	UL94V-0
No.	Part Name	Material	Qty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	WTB WAFER 1.00mm PITCH
0 — ±0.50	PART NO	WB1007H-HXXXX
0.0 — ±0.25	DRAWING NO	
0.00 — ±0.15	DATE	2020.04.10
ANGLE — ±2°		