




▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

RD&發行
2022.10.28
達立

Order Information:
DC-006-A-2.0-S242



Center Pin:
2.0: $\phi 2.00\text{mm}$

RoHS
Compatible

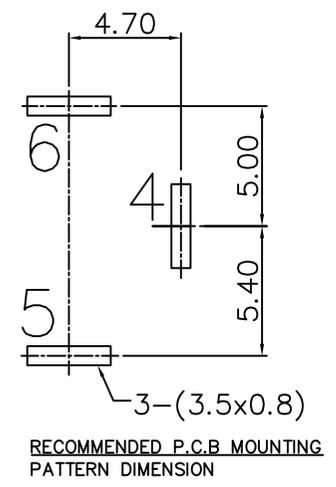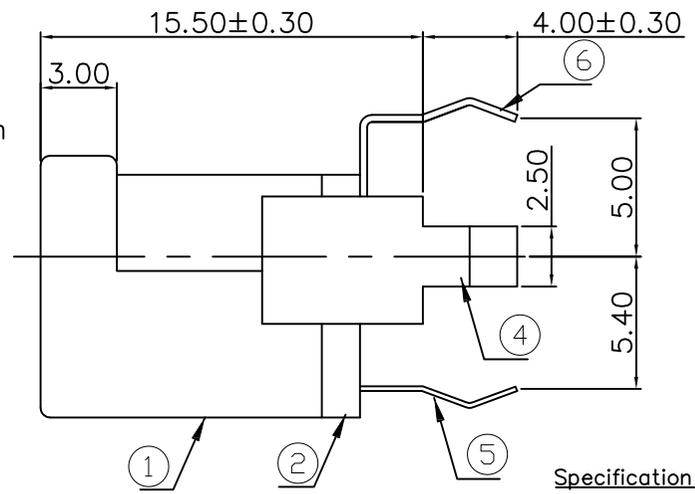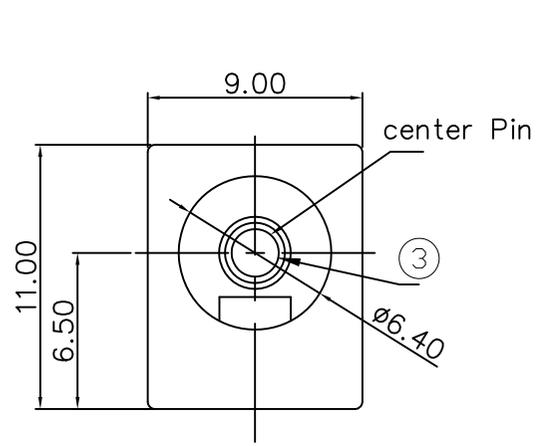

Specification

1. Rating : DC 24V, 5A.
2. Contact resistance : 50m Ω Max.
3. Insulation resistance : 100M Ω Min,
4. Withstand voltage : 500VAC.
5. Insertion and extraction force : 3N~30N.
6. life test : 5,000 cycles.

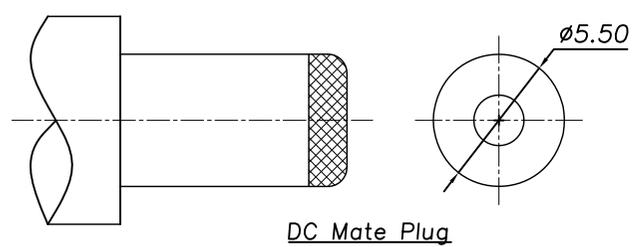

6	Terminal 6	Copper Alloy t=0.30	1	Sn Plated
5	Terminal 5	Manganese steel t=0.25	1	Sn Plated
4	Terminal 4	Copper Alloy t=0.30	1	Sn Plated
3	PIN	Copper Alloy	1	Sn Plated
2	Cover	PBT	1	Yellow
1	Housing	PBT	1	Black
No.	Part Name	Material	Q"ty	Remarks

達立科技股份有限公司

Dawning Precision Co.,Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE	
DRAWING	Jeff	UNIT	mm
CHECK	Jeff	SIZE	A4: 210*297
APPROVAL	Baker	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DC POWER SOCKET
0 _____ ± 0.40	PART NO	DC-006-A-2.0-S242
0.0 _____ ± 0.35	DRAWING NO	
0.00 _____ ± 0.25	DATE	2022.10.28
ANGLE _____ $\pm 2^\circ$		