
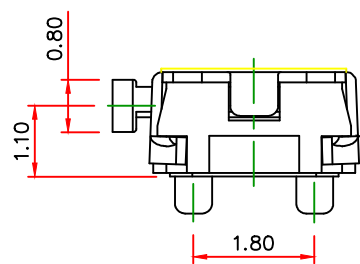
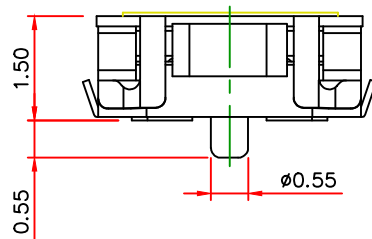



▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D
2018.11.05
達立


RoHS
Compatible

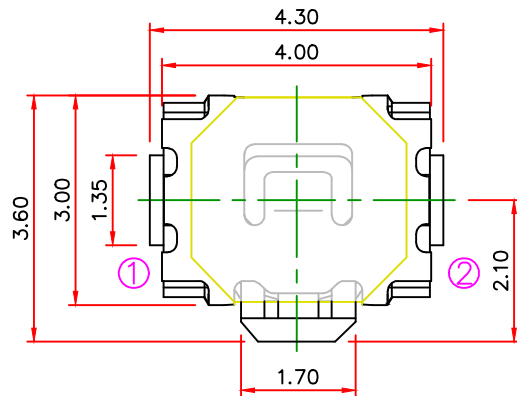

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

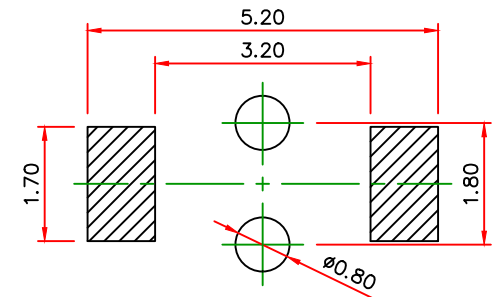

Specifications

1. Rating: DC 12V, 50mA Max.
2. Contact Resistance: 100mΩ Max.
3. Insulation Resistance: 100MΩ Min.
4. Travel: 0.20±0.1mm
5. Operating Force: 240±50gf
6. Operating Life: 50,000 cycles Min.

6.	Dust Cover	PI film	2	Yellow
5.	Terminal	Phosphor Bronze	1	Ag Plated
4.	Case	PA6T	1	Black
3.	Contact	SUS	2	Ag Clad
2.	Stem	PA6T	1	Black
1.	Cover	SUS	1	
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	TACT SWITCH
0	±0.40	PART NO	TS-A15UE-240-PI-S085
0.0	±0.30	DRAWING NO	
0.00	±0.20	DATE	2018/11/05
ANGLE	±2'		