



▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D  
2019.01.16  
達立




**RoHS**  
**Compatible**

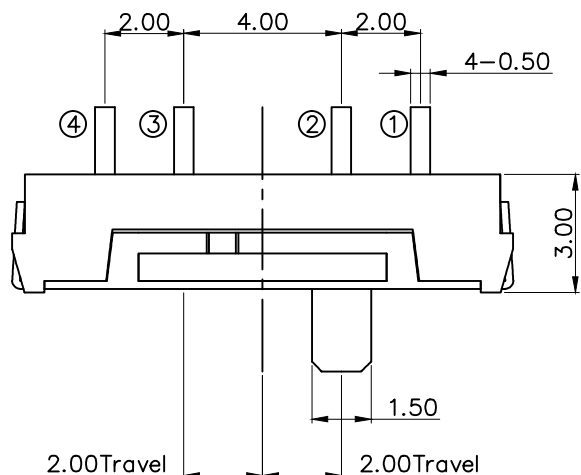

CIRCUIT DIAGRAM

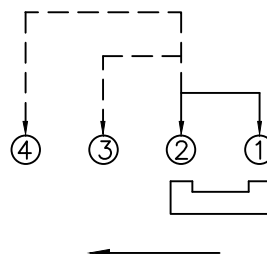

RECOMMENED P.C.B MOUNTING  
PATTERN DIMENSION

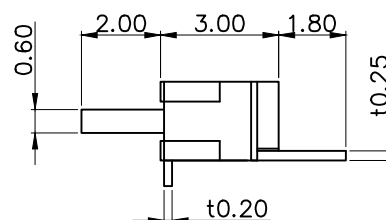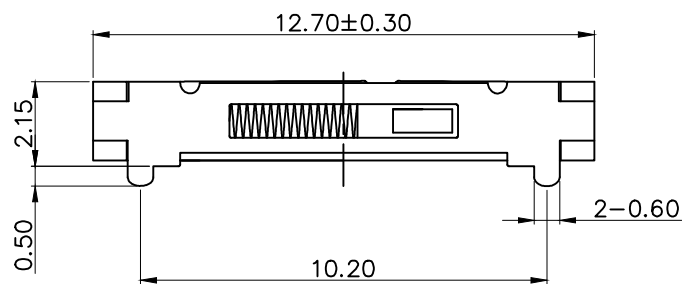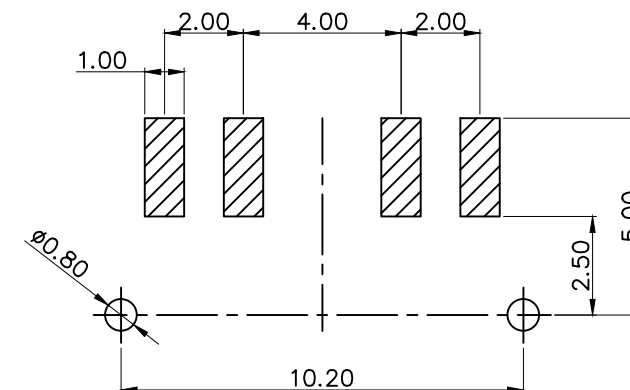

Specifications

1. Rating : DC 4V, 0.3A.
2. Travel : 2.00±0.20mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 160±50gf
6. Operating life : 10,000 cycles Min.

6	Clip	BeCu	1	Ag Plated
5	Stem	Polyamide	1	Black
4	Cover	Stainless steel	1	———
3	Spring	Stainless steel	1	———
2	Terminal	Phosphor Bronze	1	Ag Plated
1	Base	PA6T	1	Black
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	±0.40
0.0	±0.30
0.00	±0.20
ANGLE	±2'

PART NAME	SLIDE SWITCH
PART NO	SS-C70R-1-S085
DRAWING NO	
DATE	2019/01/16