

▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

F

E

D



C

B


A





RoHS
Compatible

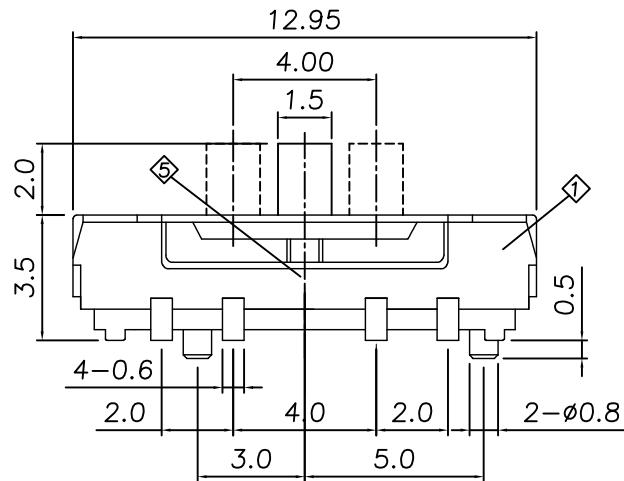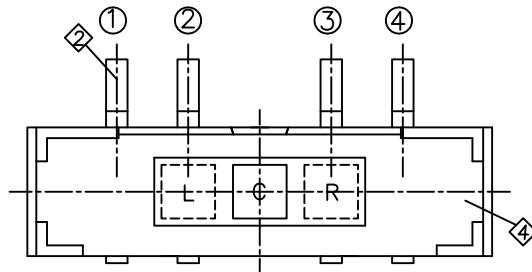

P.C.B Mounting
pattern Dimension

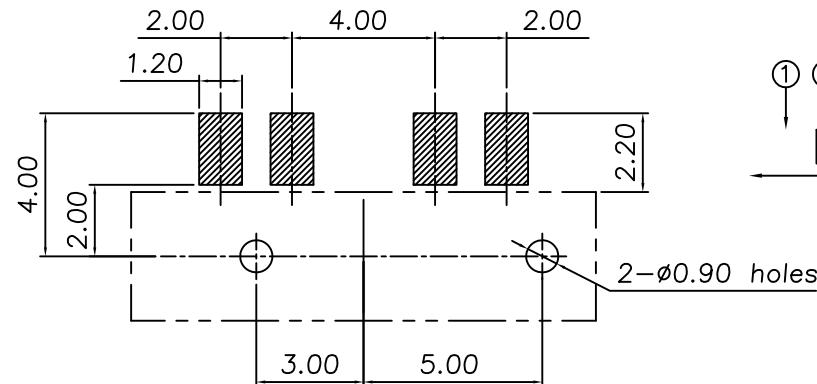

Circuit Diagram



Specifications

- Rating : DC 12V, 0.1A
- Circuit : 1C-3P
- Timing : non-shorting
- Travel : 2.0 ± 0.1 mm
- Contact Resistance : $70m\Omega$ Max.
- Operating Life : 10,000 cycles
- Operating force :

$L \rightarrow C \leftarrow R$ 250 ± 100 gf

$L \leftarrow C \rightarrow R$ 300 ± 150 gf

NO	Part Name	Material	Q'ty	Finishing
⑤	Clip	Phosphor Bronze	1	Ag Plate
④	Cover	Stainless Steel	1	
③	Knob	Nylon	1	UL 94 V-0
②	Terminal	Brass	1	Ag Plate
①	Case	Nylon	1	UL 94 V-0

DESIGN	Frank	SCALE	mm	TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
DRAWING	Frank	UNIT	mm	less than 10 ± 0.2	PART NO	SS-C80T-S085
CHECK	Frank	SIZE	A4: 210*297	10~30 ± 0.3	DRAWING NO	
APPROVAL	Eric	VERSION	01	30~100 ± 0.5	DATE	2013/03/15

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198