
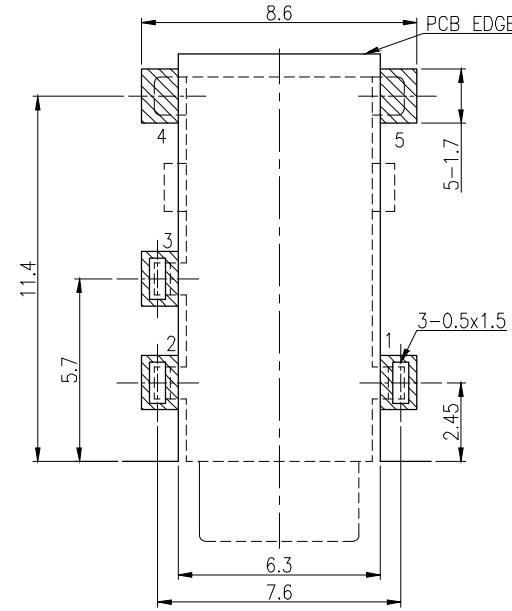
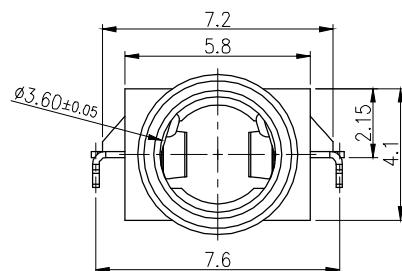
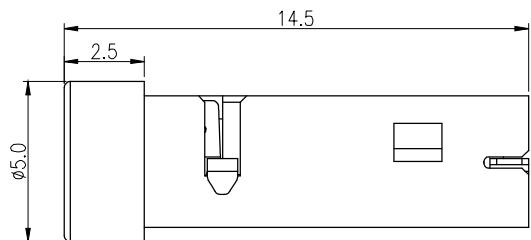
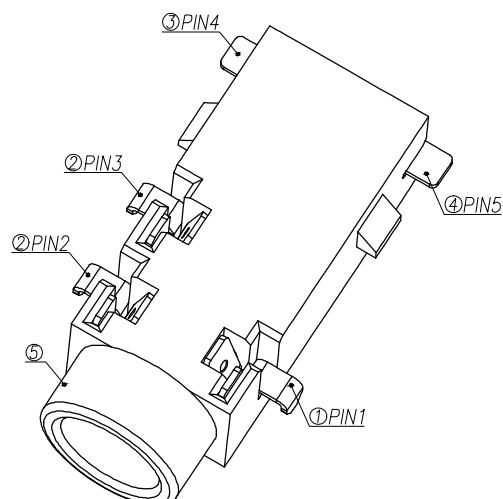
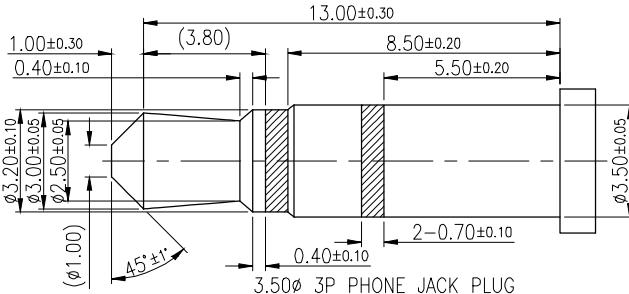


**RoHS
Compatible**

R&D發行
2022.08.19
達立

ZONE	REV	DESCRIPTION	DATE	APPD.
1				

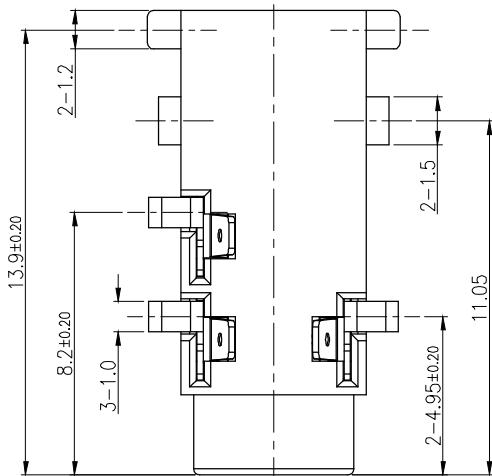

PCB LAYOUT TOP VIEW
TOLERANCES:±0.05


Specification

- Rating : DC 12V, 1A.
- Contact resistance : 100mΩ;
- Insulation resistance : ≥100MΩ (500 VDC)
- Withstand voltage : 500VAC for 1 minute.
- Insertion and extraction force : 0.3~3.0Kgf
- life test : 5,000 cycles min.

Material :

Terminal : Copper Alloy , Gold flash

Plastic : PA10T , Black / UL94V-0



CIRCUIT DIAGRAM

DESIGN	Chung	SCALE	mm	TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PHONE JACK
DRAWING	Chung	UNIT	mm	0 ±0.50	PART NO	PJ-5055D-AU-S135
CHECK	Chung	SIZE	A4: 210*297	0.0 ±0.40	DRAWING NO	
APPROVAL	Baker	VERSION	01	0.00 ±0.30	ANGLE ±2°	DATE

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198