



ZONE	REV	DESCRIPTION	DATE	APPD.


**RoHS**  
**Compatible**

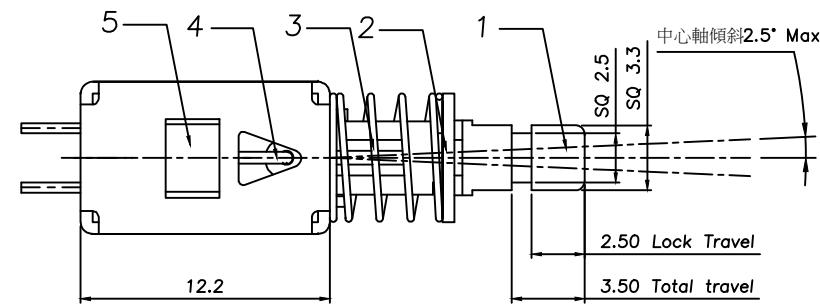



## RECOMMENDED P.C.B MOUNTING PATTERN DIMENSION



## Circuit Diagram



## NON-SHORTING

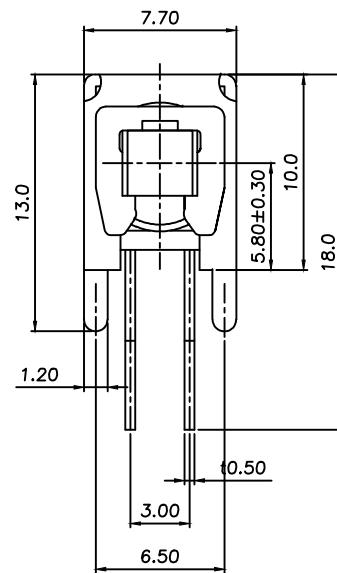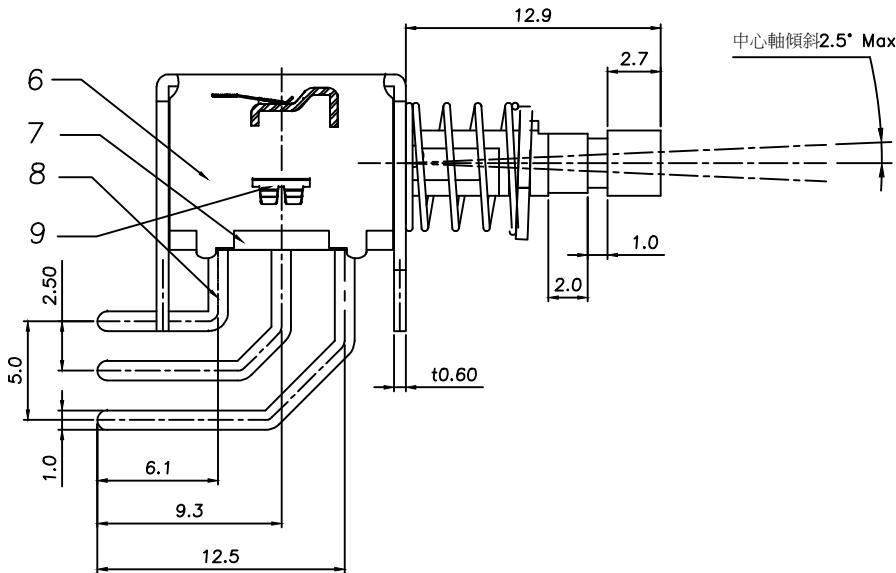

## Specification

1. Rating : DC 16V 3A (Voltage75%, Current70%)
  2. Contact resistance : 100mΩ Max.
  3. Insulation resistance : 100MΩ Min.
  4. Travel : Full-3.5mm / Lock-2.5mm
  5. Operating life : 10,000 cycles
  6. Operating force: 450±100g

9	Contact Clip	PBS Strip	1	Ag Clad
8	Terminal	Brass Strip	6	Ag Plated
7	Base	Phenolic Resin	1	Natural
6	Frame	Steel Strip	1	Ni Plated
5	Spring Plate	PBS Strip	1	Natural
4	Carn Stick	PBS Strip	1	Natural
3	Spring	Steel Wire	1	Ni Plated
2	Block	Steel Strip	1	Ni Plated
1	Knob	PA66	1	Blue
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司  
 *Dawning Precision Co.,Ltd.*  
TEL: 886-2-82273788 FAX: 886-2-82272188

DESIGN	Eason	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PUSH SWITCH
DRAWING	Eason	UNIT	mm		less than 10 — ±0.2	PART NO	PS-22F35-L-BL-S111
CHECK	Eason	SIZE	A4: 210*297		10~30 — ±0.3	DRAWING NO	
APPROVAL	Honda	VERSION	02		30~100 — ±0.5 ANGIE — ±2.5°	DATE	2018/07/19