
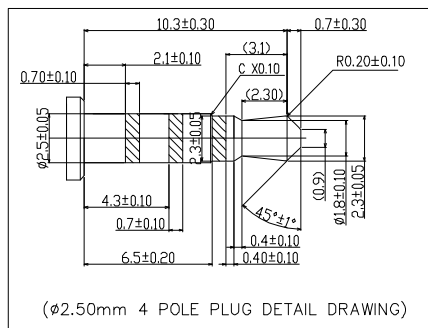






△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行  
2022.03.29  
達立

**RoHS**  
Compatible

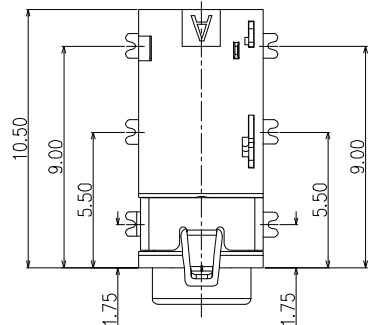


RECOMMENDED P.C.BLAYOUT  
TOLERANCE: ±0.05 (TOP VIEW)

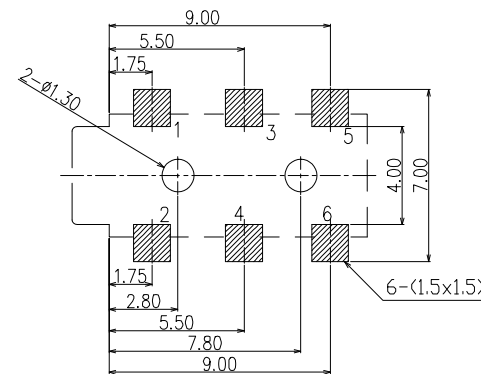

MATERIAL :

- TERMINAL 1 : COPPER ALLOY, AU PLATED
- TERMINAL 2 : COPPER ALLOY, AU PLATED
- TERMINAL 3 : STAINLESS STEEL, AU PLATED
- TERMINAL 4 : STAINLESS STEEL, AU PLATED
- TERMINAL 5 : COPPER ALLOY, AU PLATED
- TERMINAL 6 : COPPER ALLOY, AU PLATED
- HOUSING : HIGH-TEMP, BLACK

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

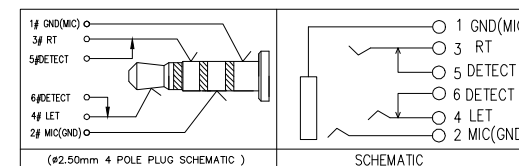

達立科技股份有限公司

Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Horace	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm)
DRAWING	Horace	UNIT	mm		0 _____ ±0.5
CHECK	Horace	SIZE	A4: 210*297		0.0 _____ ±0.4
APPROVAL	Baker	VERSION	01		0.00 _____ ±0.3
					ANGLE _____ ±2°

PART NAME	PHONE JACK
PART NO	PJ-2966ADT1-S243
DRAWING NO	
DATE	2022.03.29