



ZONE	REV	DESCRIPTION	DATE	APPD.




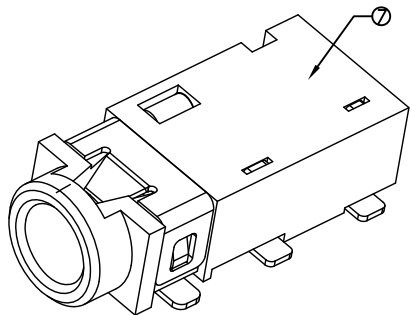


RECOMMENDED P.C.B MOUNTING
PATTERN DIMENSION



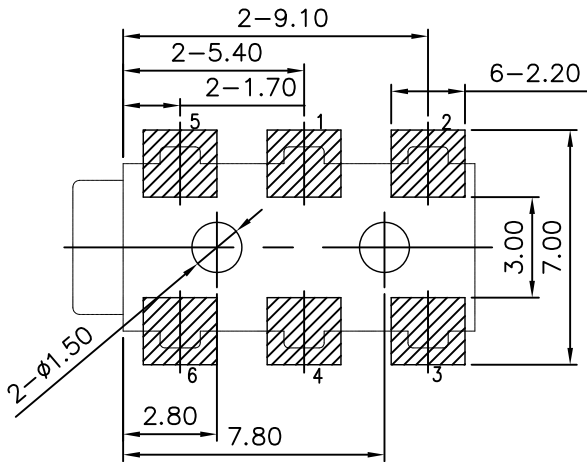


RoHS
Compatible

R&D發行
2022.08.05
達立

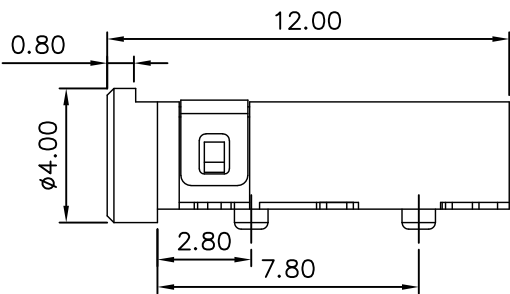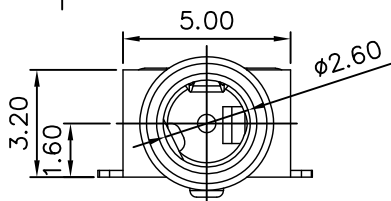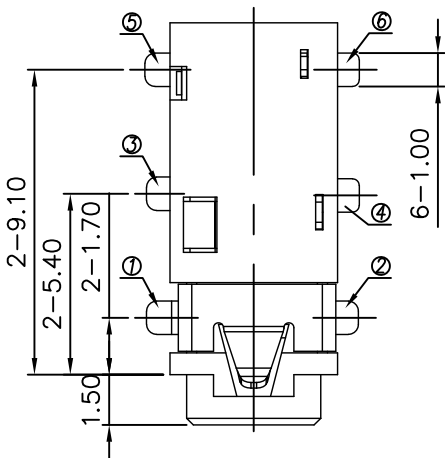

- Specifications**
- Rating : DC 20V, 1A.
 - Contact resistance : 50mΩ Max.
 - Insulation resistance : 100MΩ Min.
 - Withstand voltage : 500V/mintue
 - Mating force : 0.3~3.0kgf
 - Unmating force : 0.3~3.0kgf
 - Operating life : 5,000 cycles.

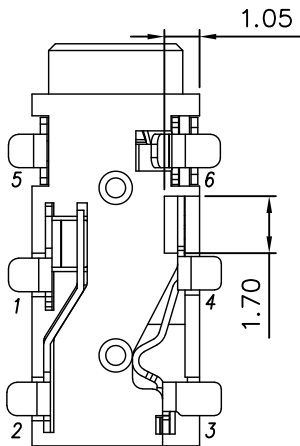

7	Terminal ⑥	Copper alloy	1	Au Plated
6	Terminal ⑤	Copper alloy	1	Au Plated
5	Terminal ④	Copper alloy	1	Au Plated
4	Terminal ③	Copper alloy	1	Au Plated
3	Terminal ②	Copper alloy	1	Au Plated
2	Terminal ①	Copper alloy	1	Au Plated
1	Housing	Thermoplastic	1	Black
No.	Part Name	Material	Q"ty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Chung	SCALE	
DRAWING	Chung	UNIT	mm
CHECK	Chung	SIZE	A4: 210*297
APPROVAL	Baker	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PHONE JACK
0 ——— ±0.50	PART NO	PJ-2866D-S135
0.0 ——— ±0.40	DRAWING NO	
0.00 ——— ±0.30	DATE	2022.08.05
ANGLE ——— ±2°		