


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2020.04.15
達立

RoHS
Compatible

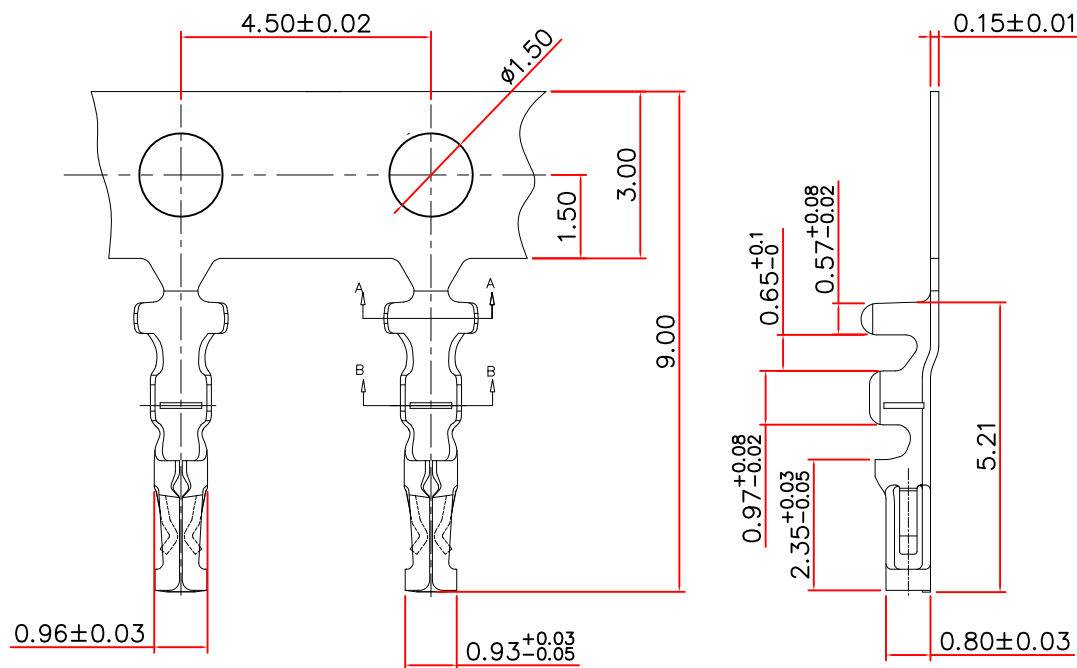

ORDER INFORMATION :
WB1253-TX

PLATING
G : GOLD FLASH
T : GOLD 3u" MIN ON CONTACT AREA
S : BRIGHT TIN 100u" MIN.

NOTE:

1. Material : Phospher Bronzes
2. Application Wire : AWG #28~AWG #32
3. Insulating O.D:1.0mm(max.)
3. Packing Number :15,000/REEL

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Jeff	SCALE		
DRAWING	Jeff	UNIT	mm	
CHECK	Jeff	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
0	± 0.50
0.0	± 0.25
0.00	± 0.15
ANGLE	$\pm 1^\circ$

PART NAME	TERMINAL 1.25mm PITCH
PART NO	WB1253-TX
DRAWING NO	
DATE	2020/04/15