
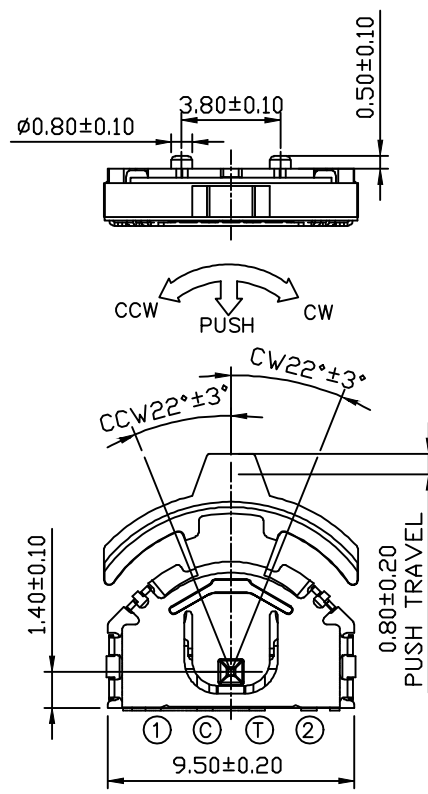



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RoHS
Compatible

R&D發行
2024.12.20
達立

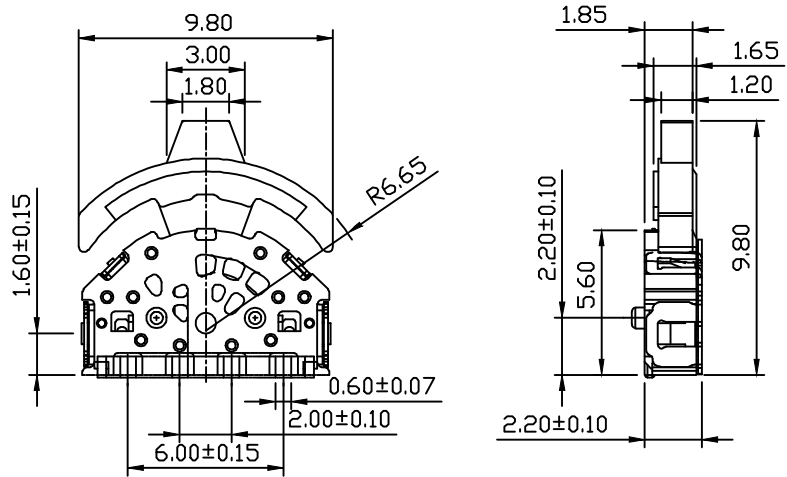

RECOMMENDED P.C.B MOUNTING
PATTERN DIMENSION

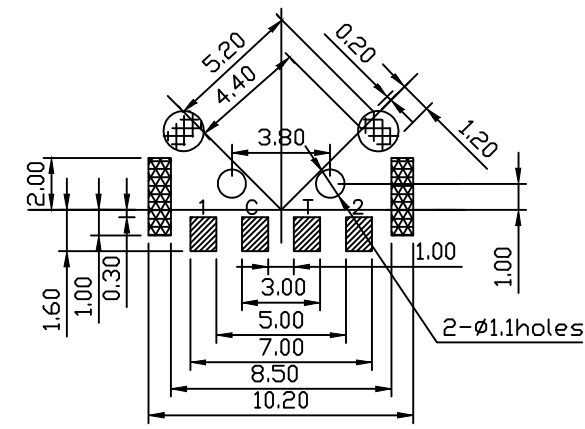


Code table(=ON)

Angle	22°	0°	22°
Terminal			
①			
②			
C			

CCW ← → CW

CIRCUIT DIAGRAM



SPECIFICATIONS

- Rating: DC 5V, 10mA.
- Contact Resistance: 300mΩ Min.
- Insulation Resistance: 100MΩ Min.
- Withstanding Voltage: AC 100V Min.
- Operating Force: Push position: 300±100gf
Lever position: 80±50gf
- Operating Life: Push position: 100,000 Cycles
Lever position: 100,000 Cycles

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Charles	SCALE	
DRAWING	Charles	UNIT	mm
CHECK	Charles	SIZE	A4: 210*297
APPROVAL	Baker	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	MULTIFUNCTION SWITCH
0 ——— ±0.50	PART NO	MF-K004M-H022-300-S164
0.0 ——— ±0.30	DRAWING NO	
0.00 ——— ±0.20	DATE	2024/12/20
ANGLE ——— ±3°		